





Fast photography of a plasma plume emission.  
Courtesy of Laurent Philippet, Laboratoire de Physique des Lasers, CNRS, Paris 13 University.

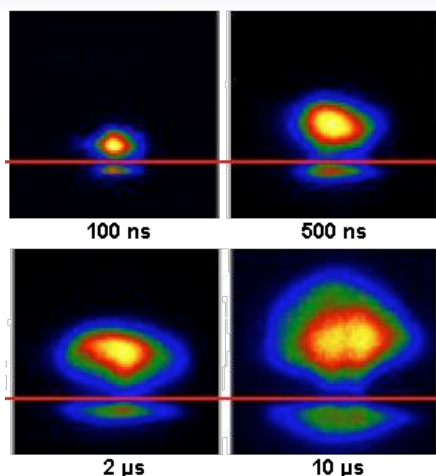

Time-Resolved

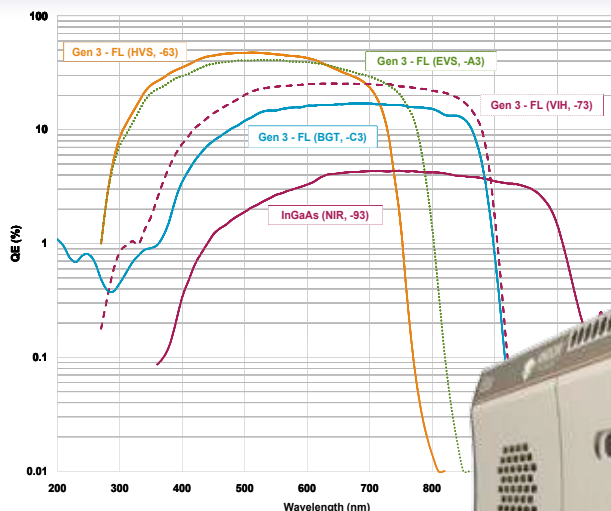

## Features and Benefits

- **USB 2.0 connection**  
Simple Plug & Play connection
- **Multi-MHz Readout speeds**  
Rapid image capture for fast transition phenomena analysis and "focusing mode"
- **Integrated Digital Delay Generator**  
With comprehensive software controls
- **Close-Coupled Gating**  
< 2 ns true optical gating speeds - ultimate temporal resolution
- **Lowest insertion delay**  
As low as 19 ns
- **Fibre-optic coupling**  
High optical throughput without vignetting
- **IntelliGate™**  
MCP gating for On/Off ratios >10<sup>8</sup> in the UV
- **Photocathode gating rate up to 500 kHz**  
Increased Signal to Noise ratio for high speed laser-based experiments
- **Cropped sensor mode**  
Specialized acquisition mode to achieve fastest image acquisition rate
- **High resolution Gen 2 and 3 intensifiers**  
Highest available intensifier resolution with QE up to 50% and sensitivity options from 120 nm to 1,100 nm
- **Thermo-Electric cooling down to -40°C**  
Ideal for low-light applications
- **Real-time control**  
Intuitive Windows user interface for real-time acquisition optimisation
- **Photocathode dry gas purge port**  
Provides further EBI reduction for low-light applications

## Industry workhorse for high-resolution, nanosecond, time-resolved Imaging

Andor's iStar DH334T intensified CCD camera series is designed to offer the ultimate integrated detection solution for high resolution, ns-scale time-resolved Imaging. The 1024 x 1024 array is ideally suited for a wide variety of time-resolved applications including Plasma analysis, LIBS when fitted to Andor Mechelle spectrograph, or fast transient phenomena. It offers Multi-MHz readout, along with laptop-friendly, USB 2.0 connectivity and a fully integrated, software-controlled **Digital Delay Generator (DDG™)**. This allows seamless integration of complex experiments at the touch of a button, with full timing and gain control through a single interactive interface. Generation 2 & 3 image intensifiers with various entrance input windows and phosphor options are available to match wavelength range requirements from 120 nm to 1,100 nm.

## Specifications Summary

| Specifications Summary              |                                  | Ø 18 mm                              | Ø 25 mm |
|-------------------------------------|----------------------------------|--------------------------------------|---------|
| Effective active area of CCD (mm)   | 13.3 x 13.3 mm                   |                                      |         |
| Active pixels                       | 1024 x 1024                      |                                      |         |
| Fibre optic taper magnification     | 1:1                              | 1.5:1                                |         |
| Effective CCD pixel size            | 13 x 13 µm<br>(100% fill factor) | 19.5 x 19.5 µm<br>(100% fill factor) |         |
| Read noise (rms)                    | As low as 4 e <sup>-</sup>       |                                      |         |
| Frame rate image/sec [spectra /sec] | Up to 4 [3,450]                  |                                      |         |
| Useful photocathode spectral range  | 120 - 1,100 nm*                  |                                      |         |
| Photocathode QE                     | Up to 50%*                       | Up to 45%*                           |         |
| Minimum optical gate width          | < 2 ns*                          |                                      |         |
| Digitization                        | 16 bit                           |                                      |         |

\* Dependant on intensifier type


## Specifications - Gen 2 Image Intensifiers •<sup>1</sup>

| Photocathode model                                              | 18*-03                        | 18*-04       | 18*-05 †         | 18H-13       | 18H-83       | 18*-E3       | 25*-03       |
|-----------------------------------------------------------------|-------------------------------|--------------|------------------|--------------|--------------|--------------|--------------|
| Useful aperture                                                 | Ø 18 mm                       |              |                  |              |              |              | Ø 25 mm      |
| Input window                                                    | Quartz                        | Quartz       | MgF <sub>2</sub> | Quartz       | Quartz       | Quartz       | Quartz       |
| Photocathode type                                               | W-AGT                         | W-AGT        | W-AGT            | WR           | UW           | WE-AGT       | W-AGT        |
| Peak QE @ room temperature • <sup>2</sup>                       | 18                            | 18           | 15               | 13.5         | 25           | 22           | 16           |
| Wavelength range                                                | 180 - 850 nm                  | 180 - 850 nm | 120 - 850 nm     | 180 - 920 nm | 180 - 850 nm | 180 - 850 nm | 180 - 850 nm |
| Image intensifier resolution limit • <sup>3</sup>               | 25 µm                         | 30 µm        | 25 µm            | 25 µm        | 25 µm        | 25 µm        | 35 µm        |
| Phosphor type [decay time to 10%]                               | P43 [2 ms]                    | P46 [200 ns] | P43 [2 ms]       | P43 [2 ms]   | P43 [2 ms]   | P43 [2 ms]   | P43 [2 ms]   |
| Minimum optical gate width (ns) • <sup>4, 5</sup>               |                               |              |                  |              |              |              |              |
| U (Ultrafast)                                                   | < 2                           | < 2          | < 5              | -            | -            | < 2          | < 3          |
| F (Fast)                                                        | < 5                           | < 5          | < 10             | -            | -            | < 5          | < 7          |
| H (High QE)                                                     | -                             | -            | -                | < 50         | < 100        | -            | -            |
| Maximum relative gain • <sup>6</sup>                            | > 1000                        | > 500        | > 1000           | > 850        | > 500        | > 300        | > 1000       |
| Maximum photocathode repetition rate<br>(with Intelligate™ OFF) | 500 kHz (continuous)          |              |                  |              |              |              |              |
| Maximum photocathode repetition rate<br>(with Intelligate™ ON)  | 5 kHz (continuous)            |              |                  |              |              |              |              |
| Equivalent Background Illuminance (EBI)                         | < 0.2 e <sup>-</sup> /pix/sec |              |                  |              |              |              |              |

\* Substitute with appropriate gate width option, e.g. 18F-03 (please refer to page 5 for detailed ordering information)

† Available with VUV-compatible spectrograph interface

## Quantum Efficiency Curves for Gen 2 Image Intensifiers •<sup>2</sup>

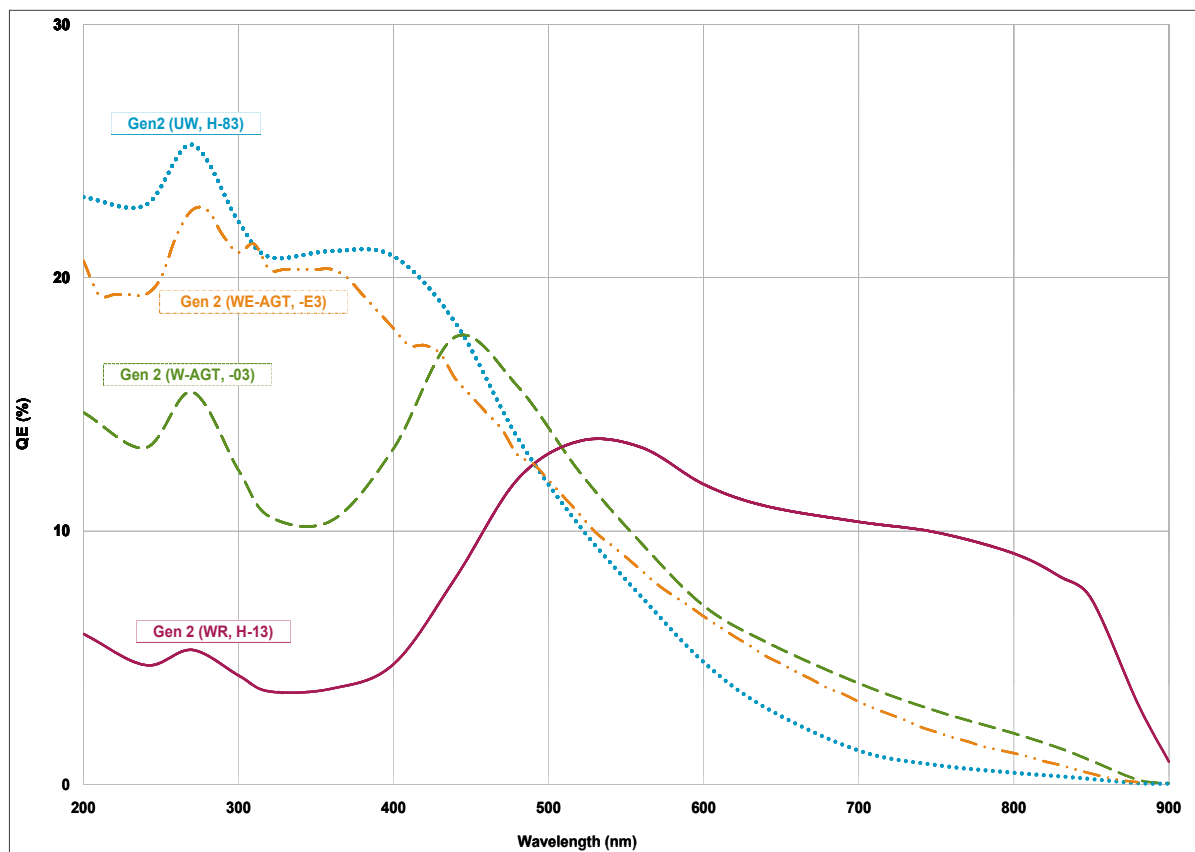


## Specifications - Gen 3 Image Intensifiers •<sup>1</sup>

| Photocathode model                                           | 18*-63                            | 18*-73          | 18*-93        | 18*-A3          | 18*-C3                           |
|--------------------------------------------------------------|-----------------------------------|-----------------|---------------|-----------------|----------------------------------|
| Useful aperture                                              | Ø 18 mm                           |                 |               |                 |                                  |
| Input window                                                 | Glass                             | Glass           | Glass         | Glass           | MgF <sub>2</sub> + F/O + Lumogen |
| Photocathode type                                            | HVS                               | VIH             | NIR           | EVS             | BGT                              |
| Peak QE @ room temperature • <sup>2</sup>                    | > 47.5                            | > 25.5          | > 4           | > 40            | > 17                             |
| Wavelength range                                             | 280 - 760 nm                      | 280 - 910 nm    | 380 - 1090 nm | 280 - 810 nm    | < 200 - 910 nm                   |
| Image intensifier resolution limit • <sup>3</sup>            | 30 µm                             | 30 µm           | 30 µm         | 30 µm           | 40 µm                            |
| Phosphor type [decay time to 10%]                            | P43 [2 ms]                        |                 |               |                 |                                  |
| Minimum optical gate width (ns) • <sup>5</sup>               | U (Ultrafast) < 2<br>F (Fast) < 5 |                 |               |                 |                                  |
| Maximum relative gain • <sup>6</sup>                         | > 200                             |                 |               |                 |                                  |
| Maximum photocathode repetition rate (with Intelligate™ OFF) | 500 kHz (continuous)              |                 |               |                 |                                  |
| Maximum photocathode repetition rate (with Intelligate™ ON)  | 5 kHz (continuous)                |                 |               |                 |                                  |
| Equivalent Background Illuminance (EBI)                      | < 0.1 e/pix/sec                   | < 0.3 e/pix/sec | < 2 e/pix/sec | < 0.2 e/pix/sec | < 0.3 e/pix/sec                  |

\* Substitute with appropriate gate width option, e.g. 18U-63 (please refer to page 5 for detailed ordering information)

## Quantum Efficiency Curves for Gen 3 Image Intensifiers •<sup>2,•7</sup>

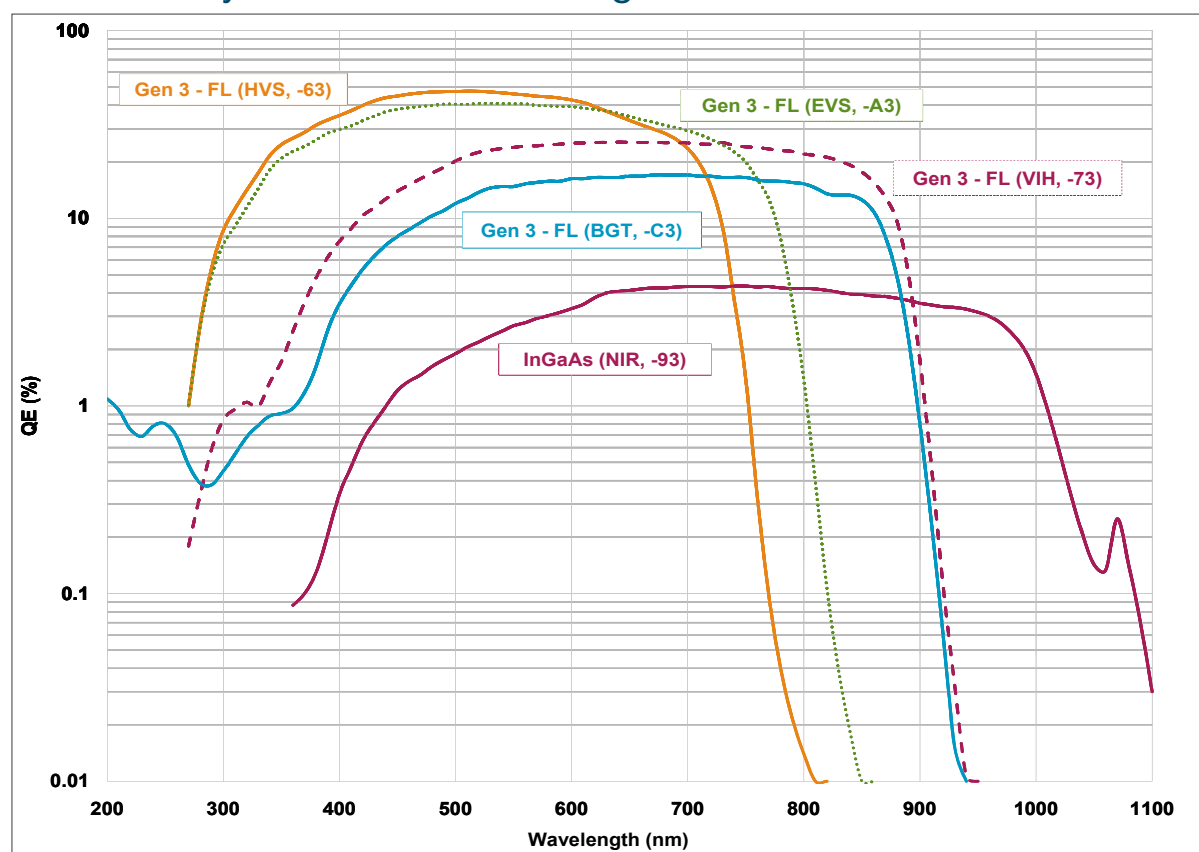

## CCD Specifications •<sup>1</sup>

|                                                                                                                                                                   |                                                    |                    |                                                |                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------|------------------------------------------------|----------------------------------------|
| Total CCD matrix size                                                                                                                                             | 1024 x 1024                                        |                    |                                                |                                        |
| Fibre optic taper magnification                                                                                                                                   | Ø 18 mm<br>1:1                                     |                    | Ø 25 mm<br>1.5:1                               |                                        |
| Effective CCD pixel size                                                                                                                                          | Ø 18 mm<br>13 x 13 µm                              |                    | Ø 25 mm<br>19.5 x 19.5 µm                      |                                        |
| Effective active area                                                                                                                                             | 13.3 x 13.3 mm                                     |                    |                                                |                                        |
| Image pixel well depth                                                                                                                                            | 100,000 e <sup>-</sup>                             |                    |                                                |                                        |
| Register well depth                                                                                                                                               | 150,000 e <sup>-</sup>                             |                    |                                                |                                        |
| Read noise e <sup>-</sup> *8                                                                                                                                      | 50 kHz                                             | 1 MHz              | 3 MHz                                          | 5 MHz                                  |
| Typical                                                                                                                                                           | 5                                                  | 8                  | 14                                             | 20                                     |
| Maximum                                                                                                                                                           | 7                                                  | 12                 | 18                                             | 50                                     |
| Vertical shift speeds                                                                                                                                             | 6.5 to 12.9 µs (software selectable)               |                    |                                                |                                        |
| Maximum frame and spectral rates                                                                                                                                  | Frame<br><br>4.2 full fps<br>7.3 fps (2x2 binning) | FVB<br><br>145 sps | Crop Mode<br>(10 rows)<br>333 fps<br>3,450 sps | Fast Kinetics<br>(4 rows)<br>29,850 Hz |
| Sensitivity                                                                                                                                                       | 1 to 5 e <sup>-</sup> /count (software selectable) |                    |                                                |                                        |
| Linearity *9                                                                                                                                                      | Better than 99%                                    |                    |                                                |                                        |
| Minimum temperature air cooled [dark current, e <sup>-</sup> /pixel/sec]<br>Coolant chiller, coolant @ 10°C, 0.75 l/min [dark current, e <sup>-</sup> /pixel/sec] | Ø 18 mm<br>-30°C [0.2]<br>-40°C [0.1]              |                    | Ø 25 mm<br>-25°C [0.4]<br>-35°C [0.15]         |                                        |

## Internal Digital Delay Generator (DDG™) Key Functions

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gate pulse delay & width        | <ul style="list-style-type: none"> <li>Adjustable from 0 ns to 10 s in 10 ps steps</li> <li>Software controlled, pre-programmed or real-time</li> </ul>                                                                                                                                                                                                                                                                                             |
| Trigger Outputs                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output A, B and C               | <ul style="list-style-type: none"> <li>3x output, +5V CMOS level with 50 Ω source impedance; can drive 5V into a non-terminating load or 2.5V into 50 Ω load; output synchronized triggers for auxiliary equipment, e.g. lasers, flash lamps, National Instrument™ hardware</li> <li>Individual delays control from 0 ns to 10 s in 10 ps steps</li> <li>Configurable Polarity</li> <li>Software controlled, pre-programmed or real-time</li> </ul> |
| Fire                            | <ul style="list-style-type: none"> <li>5V CMOS level reference signal for beginning and end of individual CCD exposure</li> </ul>                                                                                                                                                                                                                                                                                                                   |
| Arm monitor                     | <ul style="list-style-type: none"> <li>5V CMOS level reference signal to indicate when system is ready to accept external triggers. Signal goes high when system is ready to accept external triggers (after a readout has finished) and goes low when the exposure is finished</li> </ul>                                                                                                                                                          |
| Gate & output A, B and C jitter | <ul style="list-style-type: none"> <li>35 ps rms (relative to external trigger signal)</li> </ul>                                                                                                                                                                                                                                                                                                                                                   |
| Trigger Inputs                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| External trigger                | <ul style="list-style-type: none"> <li>Trigger input for CCD and Digital Delay Generator</li> <li>Up to 500 kHz for Integrate-On-Chip mode</li> <li>Software-configurable Polarity, Termination and Trigger Threshold</li> <li>Fast external software option for most rapid camera response to external trigger (CCD keep clean interruption) – no need for pre-trigger pulse</li> </ul>                                                            |
| Direct gate                     | <ul style="list-style-type: none"> <li>TTL input for exact external control of photocathode width and timing with smallest insertion delay.</li> </ul>                                                                                                                                                                                                                                                                                              |
| Additional Controls             |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Gate monitoring                 | <ul style="list-style-type: none"> <li>AC coupling from photocathode to monitor exact photocathode on/off switching and timings</li> </ul>                                                                                                                                                                                                                                                                                                          |
| Insertion delay                 | < 19 ns in direct gate operation                                                                                                                                                                                                                                                                                                                                                                                                                    |

Have you found what you are looking for?

**Need faster response phosphor for Fast Kinetics?** P46 phosphor is available as an option for all models.

**Need a customized version?** Please contact us to discuss our Customer Special Request (CSR) options.

## Creating The Optimum Product for You

How to customize the New iStar DH334T:

### Step 1.

Select the diameter of intensifier required.

### Step 2.

Select the minimum gating speed option that best suits your needs. For the available combinations please refer to the image intensifier tables on pages 2 and 3.

### Step 3.

Select the image intensifier type that best suits your needs.

### Step 4.

Please indicate which software you require.

### Step 5.

For compatibility, please indicate which accessories are required.



### Step 1.

Choose intensifier diameter

18: Ø 18 mm  
25: Ø 25 mm

### Step 2.

Choose minimum gating speed

H: High QE, slow gating  
F: Fast gating  
U: Ultra fast gating

### Step 3.

Choose image intensifier option (Gen 2):

03: W-AGT photocathode, P43 phosphor  
04: W-AGT photocathode, P46 phosphor  
05: W-AGT photocathode, MgF<sub>2</sub> window, P43 phosphor  
13: WR photocathode, P43 phosphor  
83: UW photocathode, P43 phosphor  
E3: WE-AGT photocathode, P43 phosphor

Choose image intensifier option (Gen 3):

63: HVS photocathode, P43 phosphor  
73: VIH photocathode, P43 phosphor  
93: NIR photocathode, P43 phosphor  
A3: EVS photocathode, P43 phosphor  
C3: BGT photocathode, P43 phosphor

### Step 4.

The New iStar ICCD also requires at least one of the following software options:

**Solis for Time-Resolved A** 32-bit application compatible with 32 and 64-bit Windows (XP, Vista and 7) offering rich functionality for data acquisition and processing. AndorBasic provides macro language control of data acquisition, processing, display and export.

**Andor SDK** A software development kit that allows you to control the Andor range of cameras from your own application. Available as 32 and 64-bit libraries for Windows (XP, Vista and 7) and Linux. Compatible with C/C++, C#, Delphi, VB6, VB.NET, LabVIEW and Matlab.

### Step 5.

The following accessories are available:

**LM-C** C-mount lens adaptor

**LM-NIKON-F** F-mount lens adaptor

**ACC-XW-CHIL-160** Oasis 160 Ultra compact chiller unit

**ACC-6MM-TUBING-2xxxxM** 6 mm tubing option for ACC-XW-CHIL-160

**ELC-05323** i<sup>2</sup>c to BNC cable for Shamrock shutter control

In addition to the accessories listed the following special options are also available:

90° USB connection

UV or visible lenses or adaptor extension tubes

Please contact your local Sales representative for details of how to order any of these items.

#### Spectrograph Compatibility



The iStar series is fully compatible with Andor's Shamrock spectrograph (163 - 750 mm focal lengths) family. Spectrograph mounting flanges and software control are available for a wide variety of 3<sup>rd</sup> party spectrographs including, McPherson, JY/Horiba, PI/Acton, Chromex/Bruker, Oriel/Newport, Photon Design, Dongwoo, Bentham, Solar TII and others.

No specific flange is required for the **Andor Mechelle 5000** as this combination comes as a fully integrated system.



## Product Drawings

Dimensions in mm [inches]

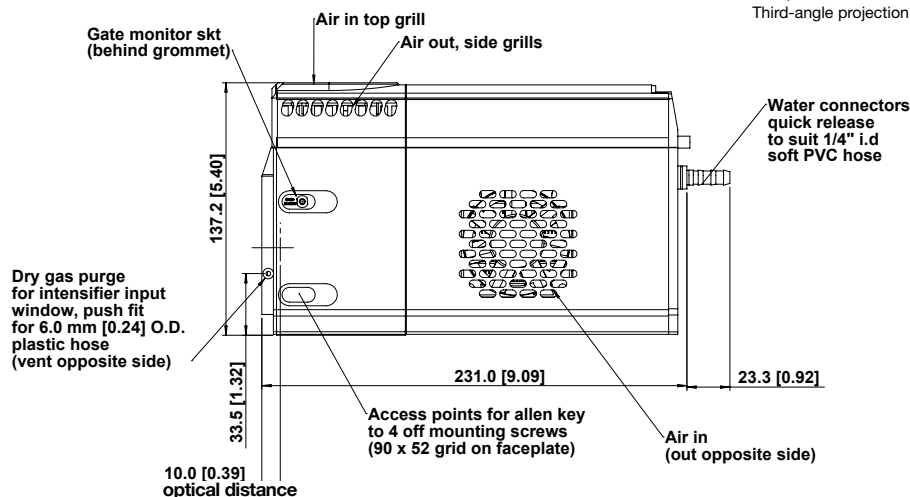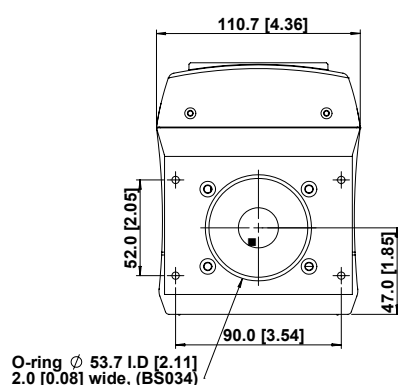

Weight: 4.2 kg [9 lb 4 oz]

■ = position of pixel 1,1

## Connecting to the iStar

### Camera Control

Connector type: USB 2.0

### Logic Input / Output

Connector type: SMA, provided with SMA - BNC cable

5x outputs: FIRE pulse, Output A, B, C from DDG™ and ARM

2x inputs: Camera trigger from 3<sup>rd</sup> party source & direct gate for complete, direct external control of intensifier gating


### I<sup>2</sup>C connector

Compatible with Fischer SC102A054-130, pin-outs as follow:

1 = Shutter (5V CMOS level with 50 Ω impedance), 2 = I<sup>2</sup>C Clock (5V), 3 = I<sup>2</sup>C Data (5V), 4 = +5 Vdc, 5 = Ground

### Gate Monitor

1x output: AC coupling to photocathode

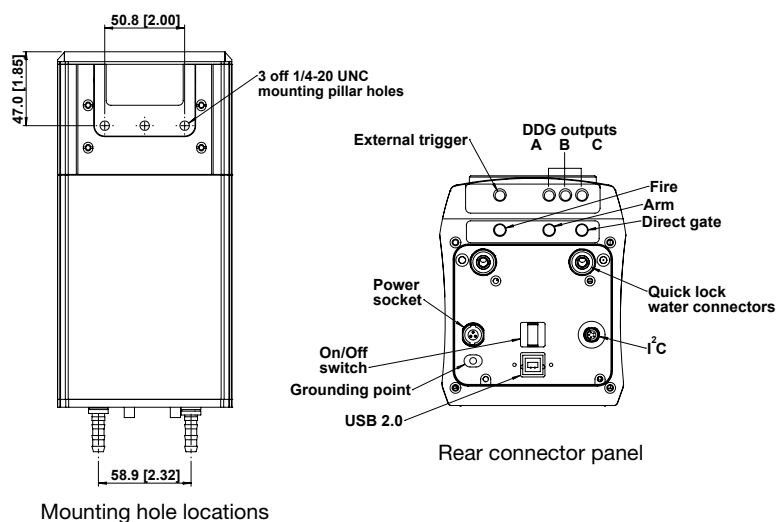

Mounting hole locations

## Applications Guide

|                                                   | Gen 2 | Gen 2 UV Enhanced<br>(-05, -83, -E3) | Gen 3* | InGaAs |
|---------------------------------------------------|-------|--------------------------------------|--------|--------|
| Plasma Studies                                    | ✓     | ✓                                    | ✓      | ✓      |
| Laser Induced Fluorescence (LIF, PLIF)            | ✓     | ✓                                    | ✓      |        |
| Time Resolved Luminescence Imaging & Spectroscopy | ✓     | ✓                                    | ✓      |        |
| Laser Induced Breakdown Spectroscopy (LIBS)       | ✓     | ✓                                    | ✓      |        |
| Transient Absorption Imaging                      | ✓     | ✓                                    | ✓      | ✓      |
| Time Resolved Photoluminescence Imaging           |       |                                      | ✓      | ✓      |
| Particle Image Velocimetry (PIV)                  | ✓     | ✓                                    | ✓      |        |

\* Gen 3 typically do not exhibit any UV response - Andor -C3 is constructed with an additional input phosphor interface to provide this UV response.

✓ = Suitable  
✓ = Optimum





## Order Today

Need more information? At Andor we are committed to finding the correct solution for you. With a dedicated team of technical advisors, we are able to offer you one-to-one guidance and technical support on all Andor products. For a full listing of our local sales offices, please see: [andor.com/contact](http://andor.com/contact)

### Our regional headquarters are:

#### Europe

Belfast, Northern Ireland  
 Phone +44 (28) 9023 7126  
 Fax +44 (28) 9031 0792

#### Japan

Tokyo  
 Phone +81 (3) 3518 6488  
 Fax +81 (3) 3518 6489

#### North America

Connecticut, USA  
 Phone +1 (860) 290 9211  
 Fax +1 (860) 290 9566

#### China

Beijing  
 Phone +86 (10) 5129 4977  
 Fax +86 (10) 6445 5401

### Items shipped with your camera

Power Brick, 12V, 120W single line  
 2x 2m BNC to SMA cable  
 1x Gate Monitor cable  
 3 Metre USB cable A to B type, shielded (1 off)  
 1x Quick launch guide  
 1x CD containing Andor user guides  
 1x Individual system performance booklet

### Regulatory Compliance

Compliant with the requirements of the EU EMC and LV Directives through testing to EN 61326-1 and EN 61010-1.  
 External power supply PSE-approved

### Footnotes: Specifications are subject to change without notice

- Figures are typical unless otherwise stated.
- Typical photocathode Quantum Efficiency and standard quartz input window transmission as measured by the tube manufacturer.  $MgF_2$  window allows extended operation down to 120 nm.
- Typical resolution of the image intensifier tube only, not the overall resolution of the system. As a rough guide, the smallest resolvable FWHM feature will be approximately 2x the CCD pixel size. This is a very important consideration for optical resolution calculations in spectrograph-based systems.
- Gen 2 High QE (H) option – Photocathode QE is inherently linked to the gating speed of the intensifier. High QE option (H) offers higher peak QE than Ultrafast (U) or Fast (F) intensifiers, while exhibiting minimum gating speed one order of magnitude slower.
- Actual measured minimum optical gating of the photocathode, reflecting not only the electrical pulse width applied to the photocathode but also its inherent iris time.
- Gain is software-selectable through a 12-bit DAC and varies exponentially with DAC setting. Value refers to the ratio of max to min intensifier gain as measured for individual cameras. Actual optical gain (counts/photon) for a DAC setting is accessed by the multiplication of the relative gain (at that DAC value) by the minimum system gain (at DAC = 0, CCD e<sup>-</sup>/photon) and divided by the sensitivity (CCD e<sup>-</sup>/count) at a given CCD PAG. Sensitivities are individually measured and reported for each system.
- Combination of -73 GaAsP photocathode with a lumogen-coated fibre-optic plate and protective  $MgF_2$  window. The latter additional optical interfaces are the reason for the lowered QE in the visible NIR region, for the -C3 model.
- Measured for the entire system. Combination of CCD readout noise and A/D noise - measurement is for single pixel readout with -30°C CCD cooling and at minimum exposure time under dark conditions. Values quoted are measured with highest available PAG setting.
- Linearity is measured from a plot of counts vs exposure time under constant photon flux up to the saturation point of the system.

### Minimum Computer Requirements:

- 3.0 GHz single core or 2.4 GHz multi core processor
- 2 GB RAM
- 100 MB free hard disc to install software (at least 1 GB recommended for data spooling)
- USB 2.0 High Speed Host Controller capable of sustained rate of 40 MB/s
- Windows (XP, Vista and 7) or Linux

### Operating & Storage Conditions

Operating Temperature 0°C to 40°C ambient  
 Relative Humidity < 70% (non-condensing)  
 Storage Temperature -20°C to 55°C

### Power Requirements

110 - 240 VAC, 50 - 60 Hz



Windows is a registered trademark of Microsoft Corporation.  
 Labview is a registered trademark of National Instruments.  
 Matlab is a registered trademark of The MathWorks Inc.

TiStar334TSS 1111 R2