

45kW max.
BOILER OUTPUT*

Kitchen Boiler Pump technical spec

PART NO: FP2948 uk

OIL & GAS FIRED CONDENSING BOILERS

HIGH EFFICIENCY GAS FURNACE

AIR CONDITIONING & REFRIGERATION SYSTEMS

DESCRIPTION:

This new Kitchen Boiler Pump is designed to collect condensate from high efficiency domestic condensing boilers and discharge it up to 10m. Compact design for installation below wall mounted boilers. Using internal float switches the pump automatically removes the condensate when required.


FEATURES:

- Quick and simple to install
- Easy maintenance
- Extremely quiet operation
- Inlet fits most standard overflow pipe sizes
- High level safety cut-out
- Cleanable/replacable 70 micron internal filter
- Suitable for condense as low as pH 2.7
- Maximum water temperature: 60°C
- Continuously rated
- Inlet adaptor 19/20mm I.D. / O.D.
- 6m x 6mm pvc discharge hose

- Pipe adaptor for discharge hose
- Includes fixings

PERFORMANCE:

- Water flow rate: 12 L/hr at zero head
- Recommended head: 10m max.
- 21dB(A) at 1m

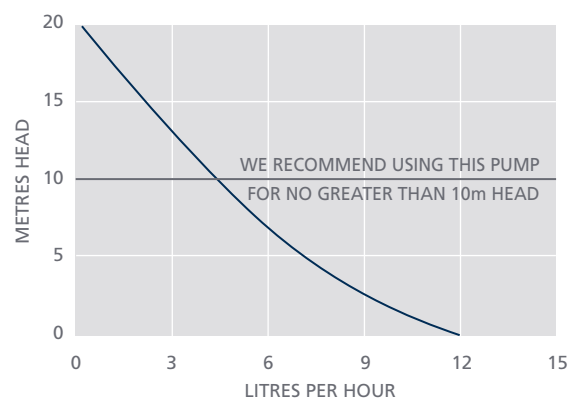

cont.

*1kW = 3400 BTUs



For further information please visit
www.aspenpumps.com
or contact +44 (0)1323 848842

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

Kitchen Boiler Pump

technical spec

PART NO: FP2948 uk

DIMENSIONS:

115mm (h) x 182mm (w) x 55mm (d)

Weight: 0.46kg

POWER SUPPLY:

- 230V AC 20W, 1PH 50/60 Hz
- 3A alarm wires, normally closed
- Double insulated

ELECTRICAL CONNECTION:

Brown: Live

Blue: Neutral

2 x Black: Safety switch



For further information please visit
www.aspenpumps.com
or contact +44 (0)1323 848842

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

designed by engineers for engineers