

537 Flexdek™

Industrial grade welded duckboard design that creates an elevated platform for safety and offers basic fatigue relief. Open grid mat construction provides excellent drainage of fluids in all directions. The anti-slip base and anti-slip surface create a healthier and safer environment in wet or oily areas. The PVC vinyl compound resists chemicals, oil and grease. Easy to install and relocate. Easy to clean and requires little to no maintenance. Suitable for heavy duty use and will not flatten over time.

Specifications:

- Industrial grade extruded PVC compound in a welded grid design
- Oil and grease resistant
- Overall thickness: 12 mm
- Weight: 7.5 kg per m²
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
- Slip resistance R10 tested according to DIN51130 and BG-rule BGR181

Recommended uses:

- Heavy duty - wet, dry or oily industrial areas

Colours:

- Black, Black/yellow

Full rolls 10m:


- 60 cm, 91 cm and 122 cm wide

Custom lengths:

- 60 cm, 91 cm and 122 cm widths per linear meter

Accessories

- Connector clips available for width-wise/lengthwise expansion
- 90-degree connections

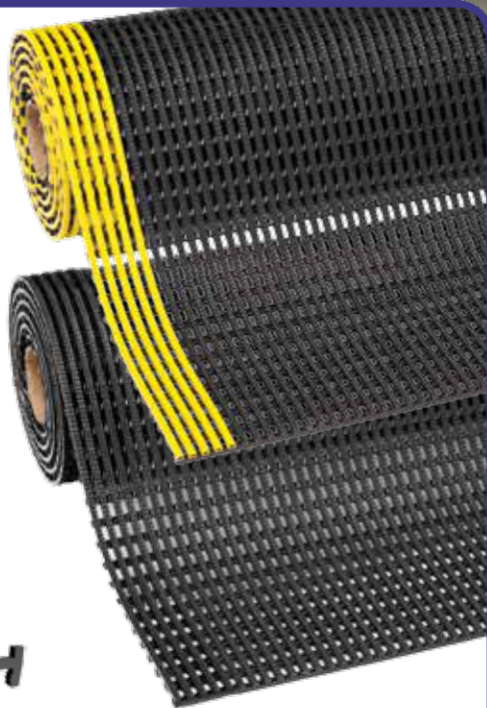

PRODUCT TESTING

Wear resistance

Slip resistance

Anti-fatigue

GOOD BETTER BEST

FLEXDEK™

