

Original


Automatic labellers for pressure-sensitive labels



Labeller 50 mt/minute

Original was designed for more specific packaging line applications; it combines a solid structure with reliability and high performance levels. Original comes in electric or pneumatic versions, with or without motor-driven rewinder, for labels up to 130 mm and 250 mm in width and 280 mm or 380 mm roll holders.

Etipack reserves the right to modify according to the technical evolution, without notice. All the rights of intellectual and technological ownership are reserved

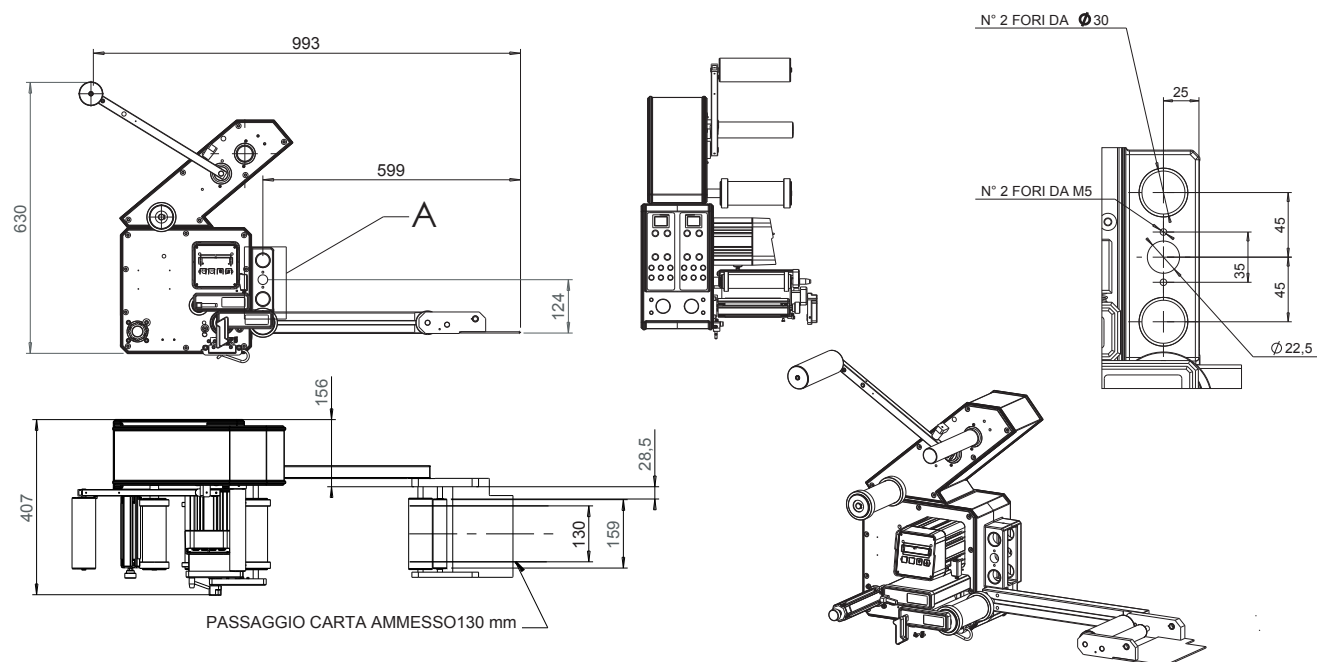

TECHNICAL SPECIFICATIONS

	Original 1.3	Original 2.5
Dispensing speed	50 mt/min	20 mt/min *
Dispensing width	8-128 mm	8-250 mm
Outside reel diameter	280 mm, 380 mm optional	280 mm, 380 mm optional
Inside reel diameter	40-75 mm	40-75 mm
Motor	stepper motor	stepper motor
Compressed air	6 bar with print units and applicators	6 bar with print units and applicators
Machine size length - width - h	1015 x 407 x 738 mm	1015 x 526 x 738 mm
Power supply	115/230 V, 50-60 Hz	115/230 V, 50-60 Hz
Electrical input	150 W	150 W
Electrical protection	IP 55	IP 55
Noise level	70 dB	70 dB
Pneumatic version	17 mt/min.	15 mt/min.

* with RM 50 mt/min