

Super




Automatic labellers for pressure-sensitive labels



Labeller 80 mt/minute

The labeller designed to meet the most demanding packaging line situations. Thanks to a powerful step motor, it can reach speeds of 80 metres/minute and of 120 metres/minute in the High Speed version. The label roll holder of 380 mm in diameter ensures sufficient production autonomy with the option of automatically switching between two different labellers.

Etipack reserves the right to modify according to the technical evolution, without notice. All the rights of intellectual and technological ownership are reserved

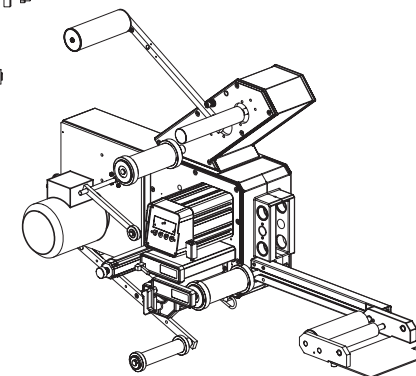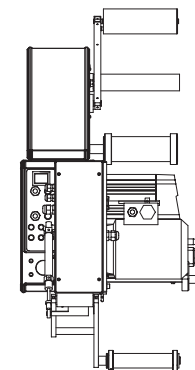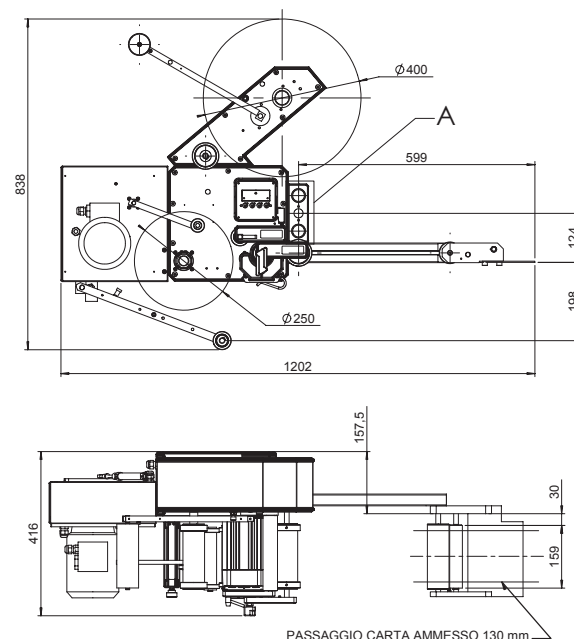

TECHNICAL SPECIFICATIONS

	Super 1.3	Super 2.5
Dispensing speed	80 mt/min *	60 mt/min
Dispensing width	8-128 mm	8-250 mm
Outside reel diameter	380 mm	380 mm
Inside reel diameter	40-75 mm	40-75 mm
Motor	stepper motor	stepper motor
Compressed air	6 bar	6 bar
Machine size length - width - h	1186 x 424 x 714 mm	1186 x 527 x 745 mm
Power supply	115/230 V, 50-60 Hz	115/230 V, 50-60 Hz
Electrical input	350 W	450 W
Electrical protection	IP 55	IP 55
Noise level	70 dB	70 dB
Pneumatic version	—	—

* Super 1.3 HS 120 mt/min

