

## **ESV 03 / 13**


**The Interface between  
Packaging Machine  
and Weigh Price Labeller**

**ESV 03  
ESV 13**





The flexible feed belt control merges up to 6 lines at the same time

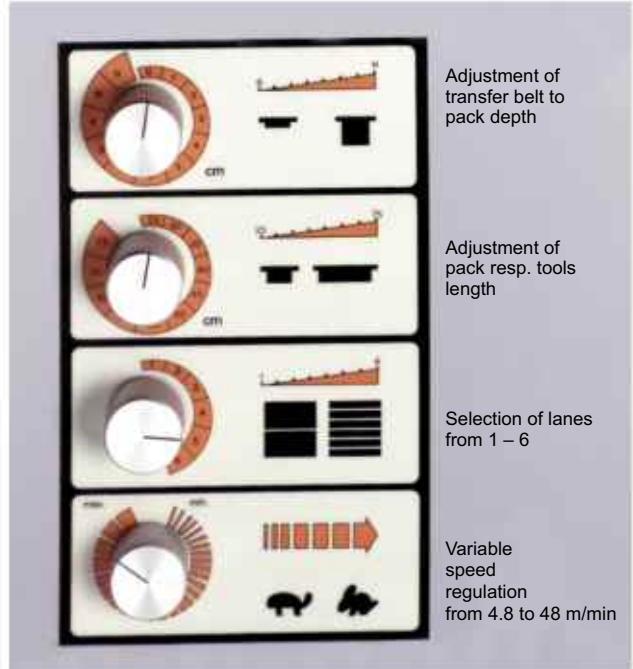

Controller for ESV



**ESPERA-WERKE GMBH**  
 Postfach 10 04 55  
 D-47004 Duisburg  
 Tel. ++49(0)203/30 54 - 0  
 Fax ++49(0)203/30 54 - 275  
 info@espera.com  
 www.espera.com

# ESV QUOTATION

To:

**ESPERA-WERKE GMBH**

- Abt. Marketing -

Postfach 10 04 55

D-47004 Duisburg

**From:**

Company

Contact

Address / Town

Postcode

Telephone

Fax

Date/Signature

**Please send us a quotation.**

In order to quote the optimal machine, please fill in the following data:

## PACKING MACHINE

Manufacturer

Model

## INFORMATION ON PACKING LINE

Outfeed conveyor existing

☐ Y ☐ N

Height of outfeed conveyor

from

to

Conveyor drive

continuous

☐

in cycles

☐

Outfeed speed

in m/min

☐

## CUT FOIL WIDTH

**ESV 03**

**A**

370

-

404 mm

Tick Box:

☐

**B**

404

-

425 mm

☐

**ESV 13**

**A**

425

-

440 mm

☐

**B**

440

-

460 mm

☐

**C**

460

-

475 mm

☐

**D**

475

-

490 mm

☐

**E**

490

-

510 mm

☐

**F**

510

-

525 mm

☐

**G**

525

-

545 mm

☐

**H**

max. 545

-

560 mm


☐

## FORMAT TOOLS

Please circle the relevant tool size:

**e.g 3 tracks, double cycle**

|                          |                          |                          |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |



|                          |                          |                          |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

In the standard version a maximum of six adjacent tracks are possible. If the overall length (cycle) is over 450mm, a performance test with original packs is required.

## PACK DATA



Stable



Unstable



Other

Please circle and enter information

Pack 1

Pack 2

Pack 3

Pack form



Length mm

Width mm

Height mm

Weight kg

Pack delivery



Cycles/min



## ESV 03

Narrow Version

Cut foil width up to 425 mm

## ESV 13

Wide Version

Cut foil width from 425 mm to 560 mm

### Available Adjustments

- Swivelling transfer belt for adjustment to pack depth
- Pack lengths up to 450 mm – in special cases up to 750 mm on request
- Selection of infeed from 1 - 6 lanes
- Variable speed regulation from 4.8 - 48 m/min


Mains Voltage 230V / 50 Hz safety plug

Power Consumption 400 VA

Operating Temperature -10°C to +40°C

The ESPERA Channelisers ESV 03 and ESV 13 can be adjusted for use between nearly any packing machine and weigh price labeller.

An optimal adjustment to existing production lines is assured by a variable speed conveyor system also above 30 m/min, an electric height adjustment to the packaging machine, flexible setting of pack lengths resp. of the single and double tools.

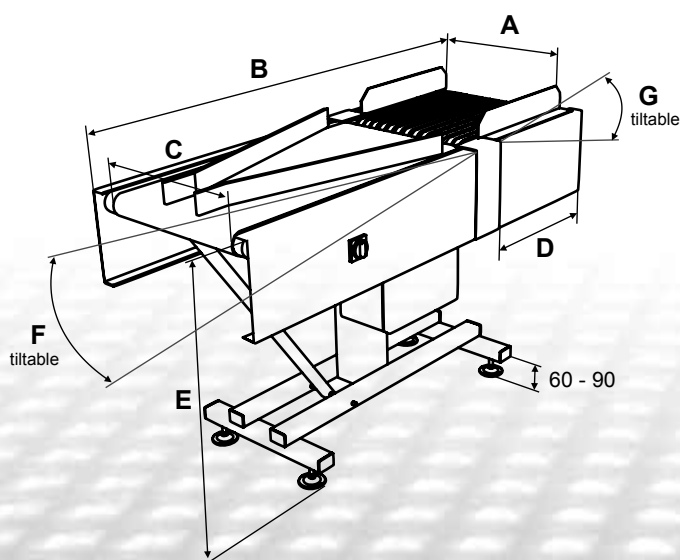

|   | ESV 03        | ESV 13        |
|---|---------------|---------------|
| A | 370 - 425     | 425 - 560     |
| B | 1560          | 1910          |
| C | 610           | 760           |
| D | 550           | 550           |
| E | 705 - 1005    | 705 - 1005    |
| F | -100 bis +200 | -125 bis +250 |
| G | -75 bis +30   | -75 bis +30   |

all data in mm

F and G cannot be tilted to the maximum at the same time.

### Altrapack Hungary Kft.

H 1119 Budapest, Keveháza utca 1-3.

Tel.: 1 783-1884 Fax.: 1 783-1885

altrapack@altrapack.hu

www.altrapack.hu

Germany • Australia • Austria • Belarus • Belgium • Canada • Chile • Croatia • Czech Republic • Denmark • England • Finland • France • Greece • Ireland • Iceland • Israel • Italy • Kazakhstan • Liechtenstein • Luxembourg • Mexico • Netherlands • Norway • Poland • Portugal • Rumania • Russia • Sweden • Switzerland • Slovakia • Spain • South Africa • Taiwan • Turkey • Ukraine • USA