


SPX312 Main Features

GEOMETRICAL STABILITY CONTROL

- ✓ Outriggers multi-position and angle
- ✓ Automatic load of working area
- ✓ Different working area:
 - Red - 0%
 - Grey - pick&carry
 - Yellow - 50%
 - Green - 100%

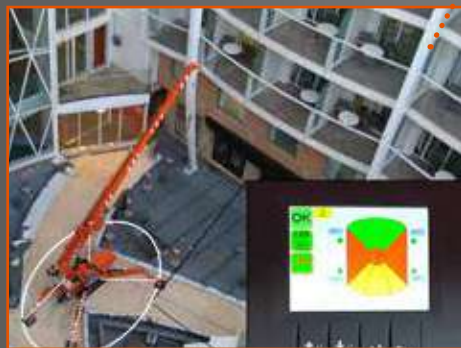

PLUG&PLAY SYSTEM CONTROL

- All accessories and tools:
- ✓ Integrated with the crane
 - ✓ Immediately recognized by the software
 - ✓ With a single radio remote control (same of the crane)



DIFFERENT ATTACHMENTS

- ✓ Three different JIBS
- ✓ Different tools completely integrated and radio remote controlled: glass manipulator, pipe manipulator, hydraulic fork...

SEARCHER HOOK



MANUAL JIB



HYDRAULIC JIB




SPX312



Jekko srl
Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com

Product Catalog

SPX312



1200 kg



2790 x 770 x 1600 mm



10.9 m



9.5 m

The proper mini crane:
compact, easily maneuverable and versatile.
The perfect solution for any indoor job or to work in skyscrapers all over the world.



Technical Information

* SPX312H: for hydraulic jib

Dimension	 L x W x H	2790 x 770 x 1600 mm		
Stab Area		3700 x 3700 mm		
Crane & Options Weights		Kg		
		SPX312CP	1800	
		SPX312C+	1800	
		/		
		2T-D7	20	
	 AUX	PP400-4DX PP220-4DX PP220-2DX	45	
			JIB800GX	20
			JIB400.1MX	60
	JIB400.1HX		90	
SPX312CP	Petrol Engine	YAMAHA MZ 360	7.6 kW 10.4 Hp	
SPX312C+	Standard or Lithium Battery	N.4 BATTERIES 6V, 240Ah	4.0 kW 5.5 Hp	
Speed		CP 1.7 km/h C+ 0.85 km/h		
Gradability		20°		
Ext. Tracks		770-1065 mm		



Boom Length

2.2 - 7.6 m 40 sec.

Working Angle

0° / 75° 24 sec.

Rotation

330° / 1.0 rpm

Electric Power Pack

4 kW - 3F 400 VAC 50 Hz
AUX EU: 2 kW - 1F 220 VAC 50 Hz USA/CANADA: 4 kW - 1F 110 VAC 60 Hz

Max. Track Load

0.44 kg/cm ²

Max. Outrigger Load


MAX 1850 kg



Winch & Fall Stages




600 kg (Single line)
63 m - Ø 7 mm
15.1-31.8 m/min.

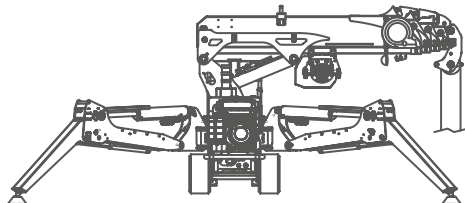





Max. Capacity	Line	Metres
1200 kg	2	-29 m
600 kg	1	-59 m



Load Chart

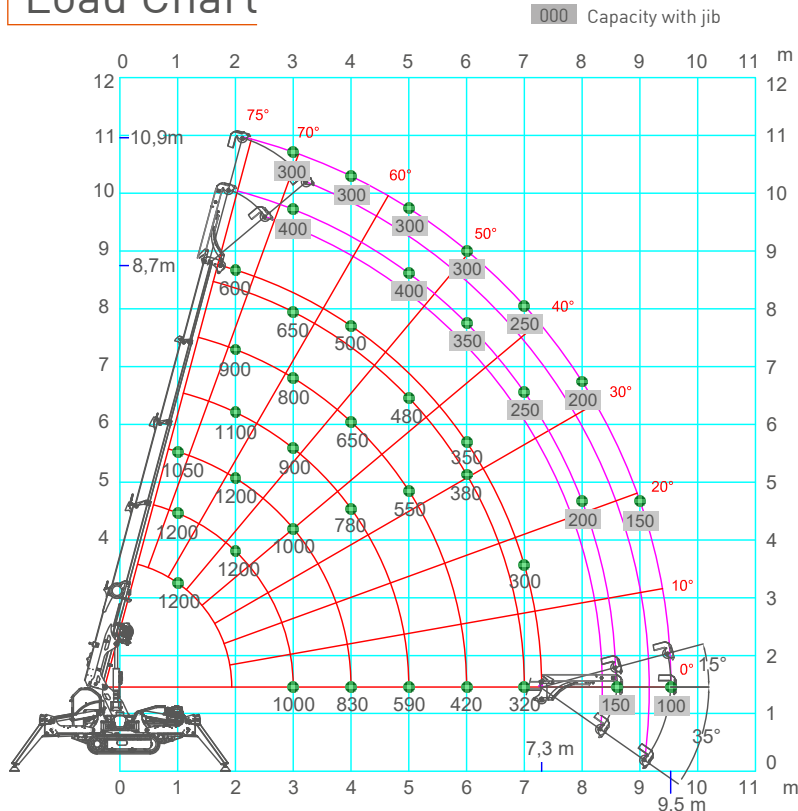

Dimensions

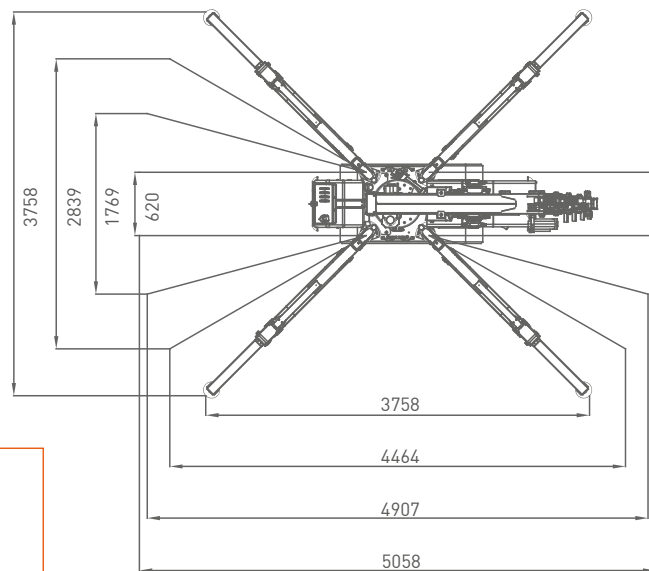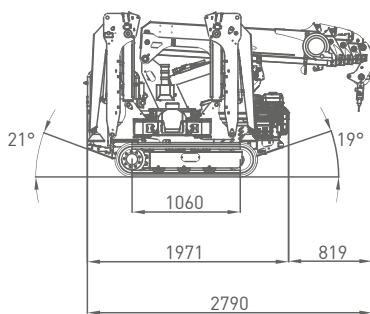


Tools Configurations

JIB800GX		JIB400.1M & JIB400.1HX	
max	800 kg	max	400 kg
max	600 kg @ 9.3 m	max	300 kg @ 10.9 m
max	200 kg @ 8 m	max	100 kg @ 9.5 m

Crane Options

CRANE OPTIONS

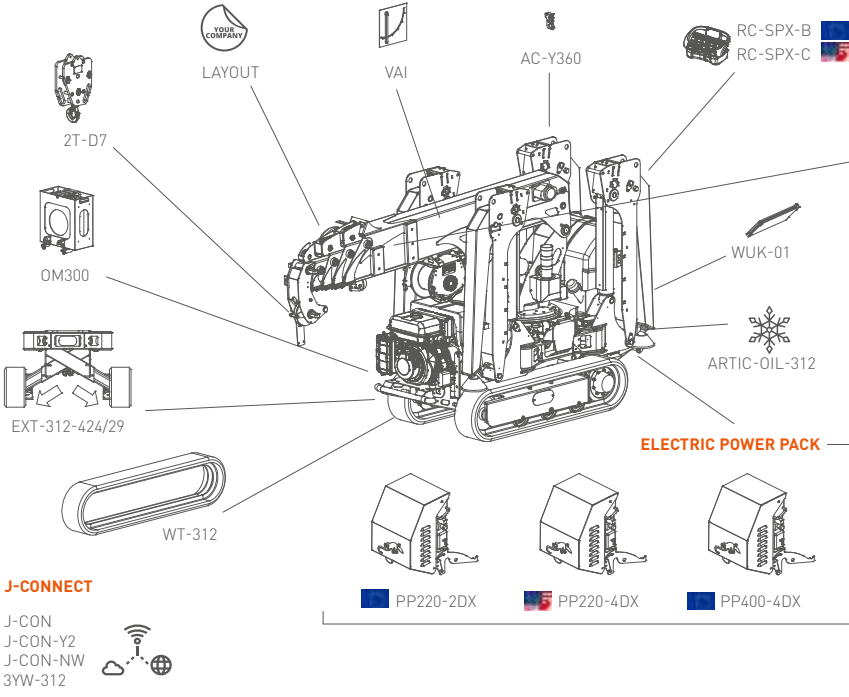

ATTACHMENTS & TOOLS

