

Digital Caliper 16 EXC with ceramic measuring faces 16 EXP with double prisma guide



Features

Functions:

ON/OFF
RESET (Zero setting)
mm/inch
DATA (Data transmission via
connection cable)


- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Dirt wipers are integrated in the slide

- Max measuring speed 1.5 m/sec (60"/sec)
- High contrast Liquid Crystal Display with 7.5 mm high digits
- Slide and beam made of hardened stainless steel

- Measuring blades for inside measurement
- Step measuring function
- Locking screw
- Scope of supply: Case, battery

Technical Data

	Measuring range		Resolution	Error limit G	Type	Order no.
	mm	(inch)	mm/inch	mm/inch		
16 EXC	150	(6")	0.01/ .0005"	0.03/ .0015"	ceramic measuring faces	4102824
16 EXP	150	(6")	0.01/ .0005"	0.03/ .0015"	double prisma guide	4102820

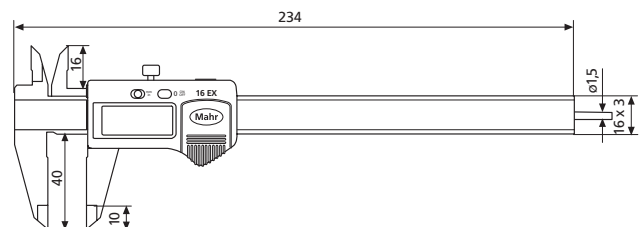

Accessories

		Order no.
Depth Measuring Bridge	16 Em	4102020
Battery 3V, Type CR 2032		4102520
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr	4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd	4102411

Accessories for Data Processing see Chapter 11

16 Em

