

CONFLUO DRY 2



CONFLUO DRY 2

CONFLUO STANDARD drain “DRY 2” made of PP with one horizontal side inlet DN40 and with one horizontal DN 50mm outlet adjustable under the angle of maximum 15°, minimum installation height of 78mm and flow rate of 48l/min.

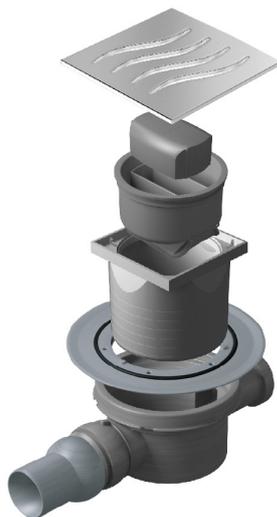
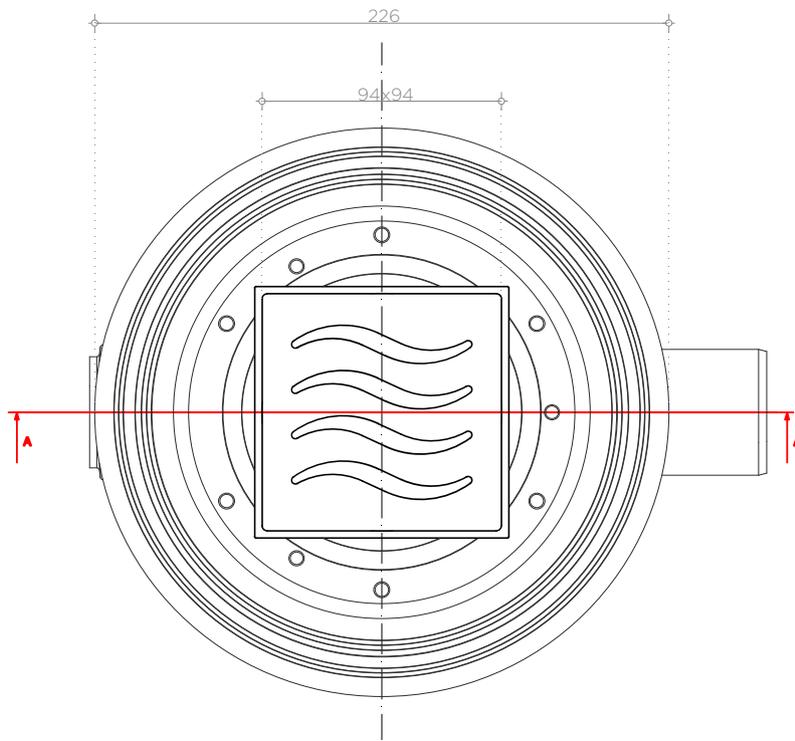
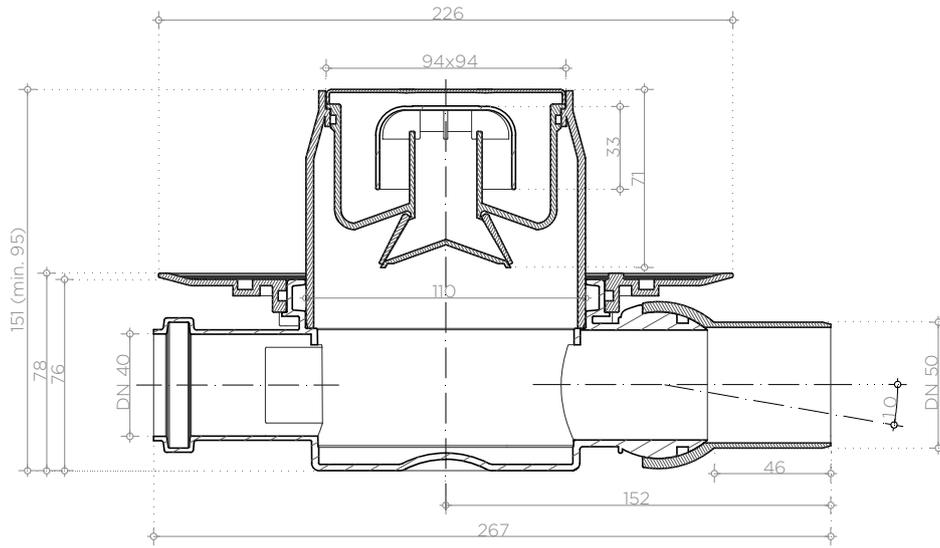
Base of drain with a socket (siphon) of a dry drain, which can be removed, water sealing height of 38mm, with hoop for hydroisolation which also can be removed if necessary and in which it is possible to attach flange for hydroisolation and height-adjustable carrier of a grid.

Stainless steel grid “DRY” dimensions of 94x94 mm.

IMPORTANT TECHNICAL INFORMATION	
Minimum installation height	78mm
Flow rate	48 l/min
Outlet	Ø50
Water seal height	38 mm
Grid material	Stainless steel AISI 304 (optionally AISI 316)
Body material	PP

DRAIN ADVANTAGE:

- Adjustable angle by 15°
- Base rotation 360°
- Easy installation and maintenance
- High flow rate

Hydroisolation flange optional

CODE	NAME	WEIGHT	BOX DIMENSIONS
13000016	CONFLUO "DRY 2" 10X10	0,766kg	300mmx200mmx250mm
13000310	CONFLUO "DRY 2" 10X10 WITH FLANGE	0,874kg	300mmx200mmx250mm

