

VERTICAL MASTS

STAR 8 STAR 10



- 9 ft 10 in (3 m) outreach.
- Compact: Rotation with zero tail swing.
- 440 lb (200 kg) platform capacity.
- Proportional electric controls.
- High autonomy.
- Internal and external use



Haulotte 
GROUP

STAR 8 STAR 10

Vertical masts

The Haulotte® advantages



- Full electric drive with the ability to drive at full height
- Proportional controls provide for smooth and progressive movements
- Narrow turning radius for better accessibility
- Increased safety with 3° slope sensor and pot hole protection
- The positive/negative jib offers more flexibility throughout the working envelope
- 2.8 mph (4.5 km/h) travel speed
- 23% gradeability
- Low total weight for easier transport and more applications
- Ergonomic and spacious cage design
- Robust, reliable and easy to maintain

STANDARD FEATURES

- 24 V Electric motor
- 24 V – 240 Ah traction batteries
- 30 Amp battery charger
- Battery charge indicator
- 2 drive speed
- 2 back driving wheels
- 2 front steering wheels
- Non marking tyres
- Free wheel device
- Hourmeter
- Horn in cage
- Emergency stop buttons at cage and ground
- 2 Control stations, cage and ground

OPTIONS & ACCESSORIES

- Centralised battery filling
- Flashing beacon
- Safety harness anchor points
- Motion alarm
- 220V line to cage
- Airline to cage

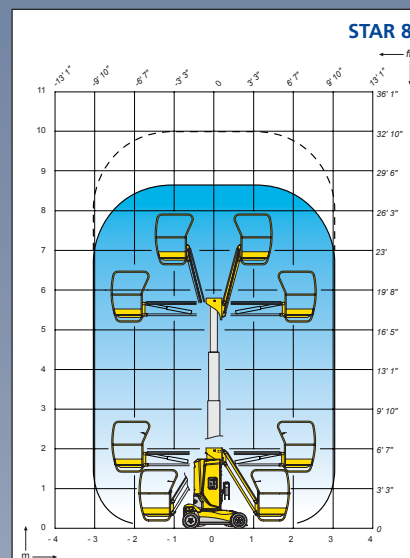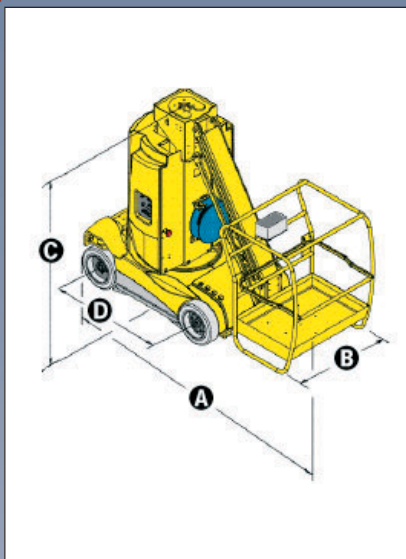

SPECIFICATIONS

	Star 8		Star 10	
Working Height	8.75 m	28 ft 8 in	10 m	32 ft 10 in
Platform Height	6.75 m	22 ft 1 in	8 m	26 ft 3 in
Horizontal outreach	3 m	9 ft 10 in	3 m	9 ft 10 in
Platform Capacity	200 kg	440 lb	200 kg	440 lb
A Length	2.62 m	8 ft 7 in	2.62 m	8 ft 7 in
B Width	1 m	3 ft 3 in	1 m	3 ft 3 in
C Stowed Height	1.99 m	6 ft 6 in	1.99 m	6 ft 6 in
D Wheelbase	1.2 m	4 ft	1.2 m	4 ft
Ground Clearance	9,6 cm	3 in	9,6 cm	4 in
Platform size	0.92 x 0.67 m		3 ft x 2 ft 2 in	
Tailswing	0		0	
Drive speed	0,7 / 4.5 km/h		0.43 / 2.8 mph	
Outside turning radius	1.88 m		6 ft 2 in	
Turntable rotation	345°		345°	
Traction batteries	24 V / 240 Ah		12 V / 240 Ah	
Gradeability	23%		23 %	
Tilt alarm	3°		3°	
Non marking tyres	16" x 5" x 10,5"		16" x 5" x 10,5"	
Weight	2.715 kg	5,985 lb	2.765 kg	6,095 lb



HAULOTTE UK LTD • Stafford Park 6 - Telford - Shropshire TF3 3AT - UK • Tel : +44 (0)1952 292753 • Fax : +44 (0)1952 292758 • e-mail: haulotte@haulotte.co.uk
 HAULOTTE SCANDINAVIA AB • Aröds Industriväg 66B - 44243 Hisingsbacka - SWEDEN • Tel : +46 (0) 31 744 32 90 • Fax : +46 (0) 31 744 32 99 • e-mail: hwallin@haulotte.se
 HAULOTTE AUSTRALIA PTY LTD • 65 Licola Cres - Dandenong - VIC - 3175 - AUSTRALIA • Tel : +61 (0)3 9706 6787 • Fax : +61 (0)3 9706 6797 • e-mail: sales@haulotte.com.au

Haulotte 
GROUP

Haulotte Group - La Péronnière - BP 9 - 42152 l'Horme - France • Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95
 e.mail - haulotte@haulotte.com • web : http://www.haulotte.com