

STEELY PLATFORMS



PRO
MAN®


SPECIAL STEELY CONSTRUCTIONS

- the supporting construction of the platforms is made of the rolled profiles and Sigma profiles
- optimal use of the groundfloor space and the platform
- the access onto the floor by means of the stairs
- the input of the goods onto the platform by means of the point of handing over or the lifting platform, eventually by the lift
- directed supplies based on the customer's needs



TECHNICAL SPECIFICATION

- the inner height of the platform is minimally 2100 mm according to ČSN
- setting of the spans of the platform columns according to the customer's wishes

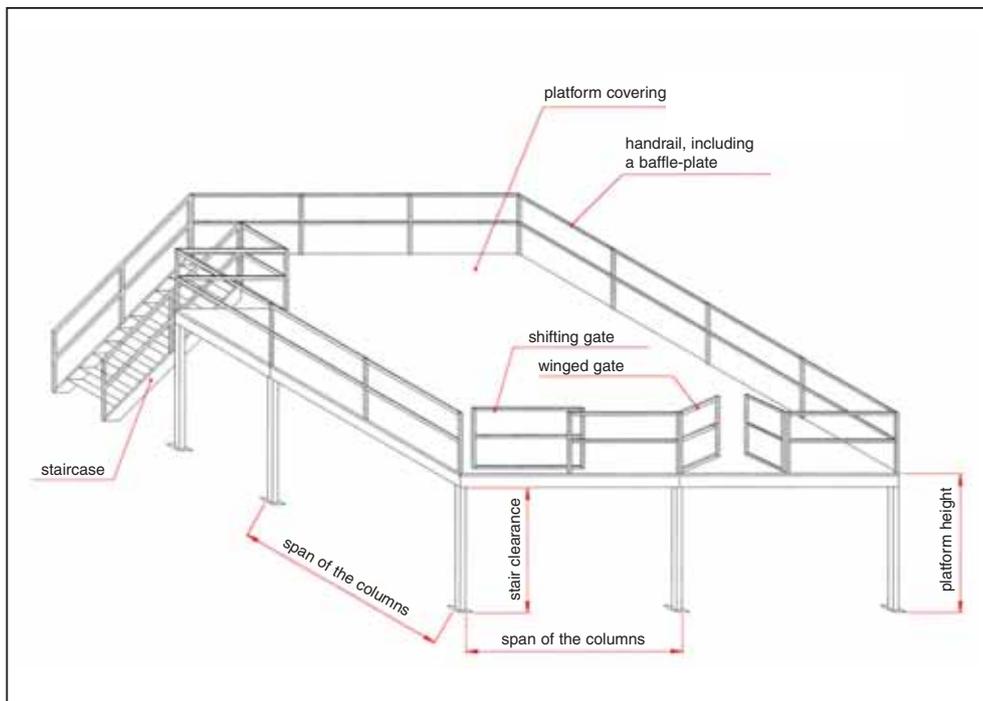

- balanced platform loading 300–800 kg/m²
- platform covering
 - chipboard
 - flooring galvanized panels
 - galvanized steely half-grates
 - steely metal sheets (ribbed or with oval protrusion)
 - chance of multistorey platforms
 - variantly possible to add the lighting

Colour design

- basic tone RAL 5010 (blue)
- to an unusual customer's wish we can supply a platform in a different colour design

*SOLUTION FOR EVERYONE
MEANS SOLUTION FOR YOU*

THE EXAMPLES OF IMPLEMENTATION



Solution for You ...
... PROMAN