



DS Biocascade 180-520 kW

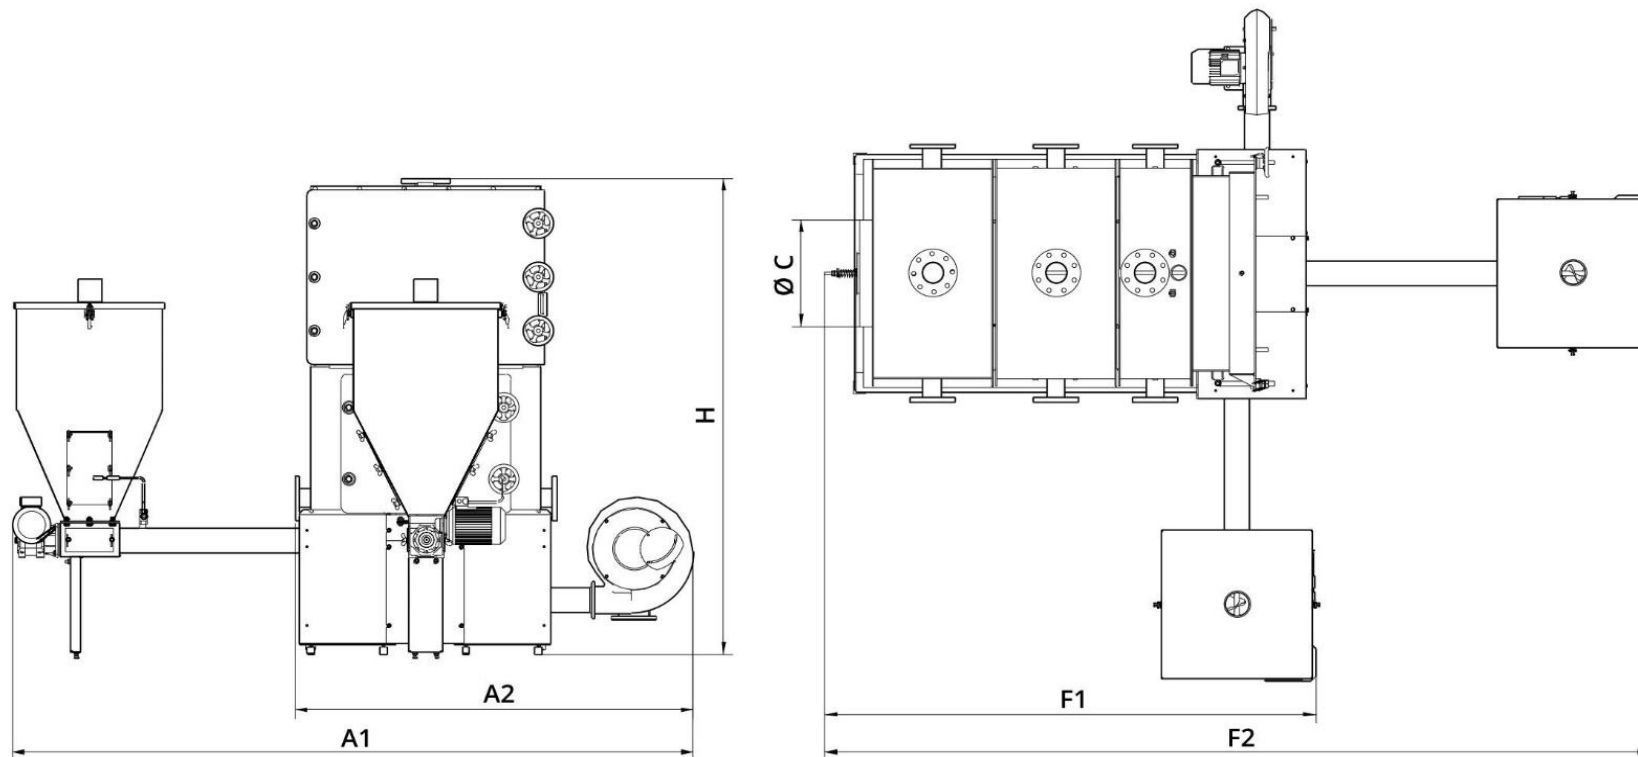

Típus	H	A1	A2	F1	F2	Ø C
DS Biomodular 180	1975	2820	1650	2030	3412	450
DS Biomodular 265	1975	2820	1650	2542	3923	450
DS Biomodular 350	1975	2820	1650	3053	4434	450
DS Biomodular 435	1975	2820	1650	3563	4944	450
DS Biomodular 520	1975	2820	1650	4072	5455	450

A mértékegységek mm-en vannak megadva!

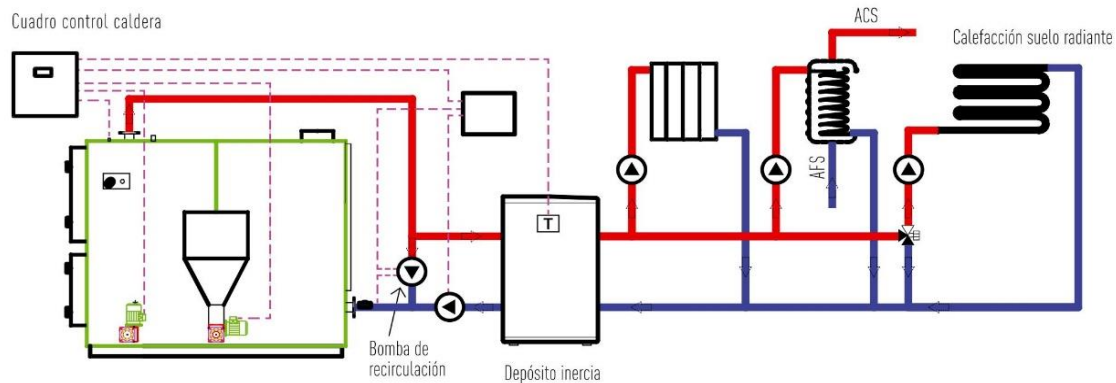

Technikai adatok		DS Biocascade 180	DS Biocascade 263	DS Biocascade 350	DS Biocascade 435	DS Biocascade 520
Teljesítmény	kW	180	263	350	435	520
	kcal/h	154800	227900	301000	374100	447200
Hatásfok	%	82-91	82-91	82-91	82-91	82-91
Kazánvíz max. hőmérséklete	°C	85	85	85	85	85
Füstgáz üzemi hőmérséklete	°C	150-190	150-191	150-192	150-193	150-194
Kazánvíz mennyisége	liter	455	690	925	1160	1395
Kazán súlya	Kg	2353	2783	3213	3643	4073



DS Optim Kft. 8200 Veszprém Lóczy Lajos u. 34/a

telefon: 06709493949

email: barath@dsenergia multipellet@gmail.com

web: www.dspellet.eu