

SCANTECH (HANGZHOU) CO., LTD. (HQ.)

Building 12, No.998, West Wenyi Road, Yuhang District, Hangzhou, Zhejiang Province, China

Tel : 0086-571-85852597 Fax : 0086-571-85370381

E-mail : market@3d-scantech.com

Website : www.3d-scantech.com

SCANTECH DIGITAL GmbH.

Dieselstrasse 18, 70771 Leinfelden-Echterdingen, Echterdingen industrial park

Tel : 0711 31013901

E-mail : market@3d-scantech.com

SCANTECH DIGITAL Inc.

15375 Barranca Parkway, Suite B-103, Irvine, CA 92618

E-mail : market@3d-scantech.com

KOREAN OFFICE

Seoul, Republic of Korea

E-mail : market@3d-scantech.com

INDIAN OFFICE

New Delhi, India

E-mail : market@3d-scantech.com



Copyright ©



NIMBLETRACK

Wireless 3D Scanning System

Nimble and Wireless, Easier Than Ever



SCANTECH (HANGZHOU) CO., LTD.

NIMBLETRACK

The NimbleTrack wireless 3D scanning system is highly compact and agile, which is designed to redefine the precise and dynamic measurements of small-to-medium-sized parts.

Thanks to powerful on-board chips and built-in battery power supply, its 3D scanner and optical tracker are fully wireless for enabling true freedom.

With the most advanced technology, it offers the ultimate 3D scanning experience for users. Both the 3D scanner and tracker can be used for vast applications to deliver efficient and reliable measurement experiences.



Wireless
Measurement



Structure with
CFFIM Technology



On-board
Edge Computing



Target-free
3D Scanning



High Frame
Rate of 120 FPS



Incredible
Compact Design





Incredible Compact & Plug-and-Play

Lightweight and compact, NimbleTrack sets a new standard for the optical 3D scanning system.

Its lightweight design allows you to measure parts wherever you need it. With a length of 57cm and a total weight of 2.2 kg, i-Tracker stands out by delivering easy uses. Besides, engineers and professionals can use the 3D scanner, weighing only 1.3 kg, for long periods without feeling tired.

The system comes with a small standard protection case that can accommodate all its instruments to deliver flexible and convenient uses.

57 cm



1.3 kg



A close-up photograph of a hand holding a sophisticated 3D scanner handle. The handle is constructed from a dark, woven carbon fiber material, giving it a high-tech, industrial appearance. It features a complex, ergonomic design with several circular sensor modules attached to its exterior. These modules have white centers and dark outer rings, some with additional smaller holes. The background is a blurred industrial setting with yellow overhead lights and metal structures, suggesting a manufacturing or research environment.

Stable Structure With CFFIM Technology

NimbleTrack's 3D scanner embraces an innovative Carbon Fiber Frame Integrated Molding (CFFIM) technology to ensure lightweight design and high strength, breaking through the limits posed by traditional assembled structures. It is highly stable as its structure is steady and it is unaffected by thermal variations. One time of calibration can ensure it works steadily for a long period. You can enjoy full control over every scan with this cutting-edge technology.

Dual Edge Computing and Robust Performance

Both NimbleTrack's 3D scanner and tracker have powerful edge computing modules, which enables it to deliver fast and smooth scanning experiences at a high frame rate of 120 FPS.

When compared with common handheld 3D scanners, it saves the need for a power supply and the hassle of sticking targets, which highly streamlined measurement processes. It tackles complex tasks with ease by delivering target-free and efficient 3D scanning.

Wireless Freedom

This nimble optical 3D scanning system sets a new benchmark for wireless and free 3D scanning. It eliminated the need for any cables to power the instrument or transfer data. On-site measurement won't be a problem even when there is no power supply available.


The 3D scanner has a built-in powerful battery, and the tracker comes with standard plug-in batteries to deliver a dual power cycle, ensuring continuous operations over a long time. All of these advancements allow you to enjoy free measurement experiences.





Unleash Precision, Unleash Excellence

Utilize the full potential of Scantech's metrology products and advanced algorithm, the system achieves an accuracy of up to 0.025 mm and maximum volumetric accuracy of 0.064 mm across the whole range. High-precision NimbleTrack enables users to capture 3D data with meticulous details.

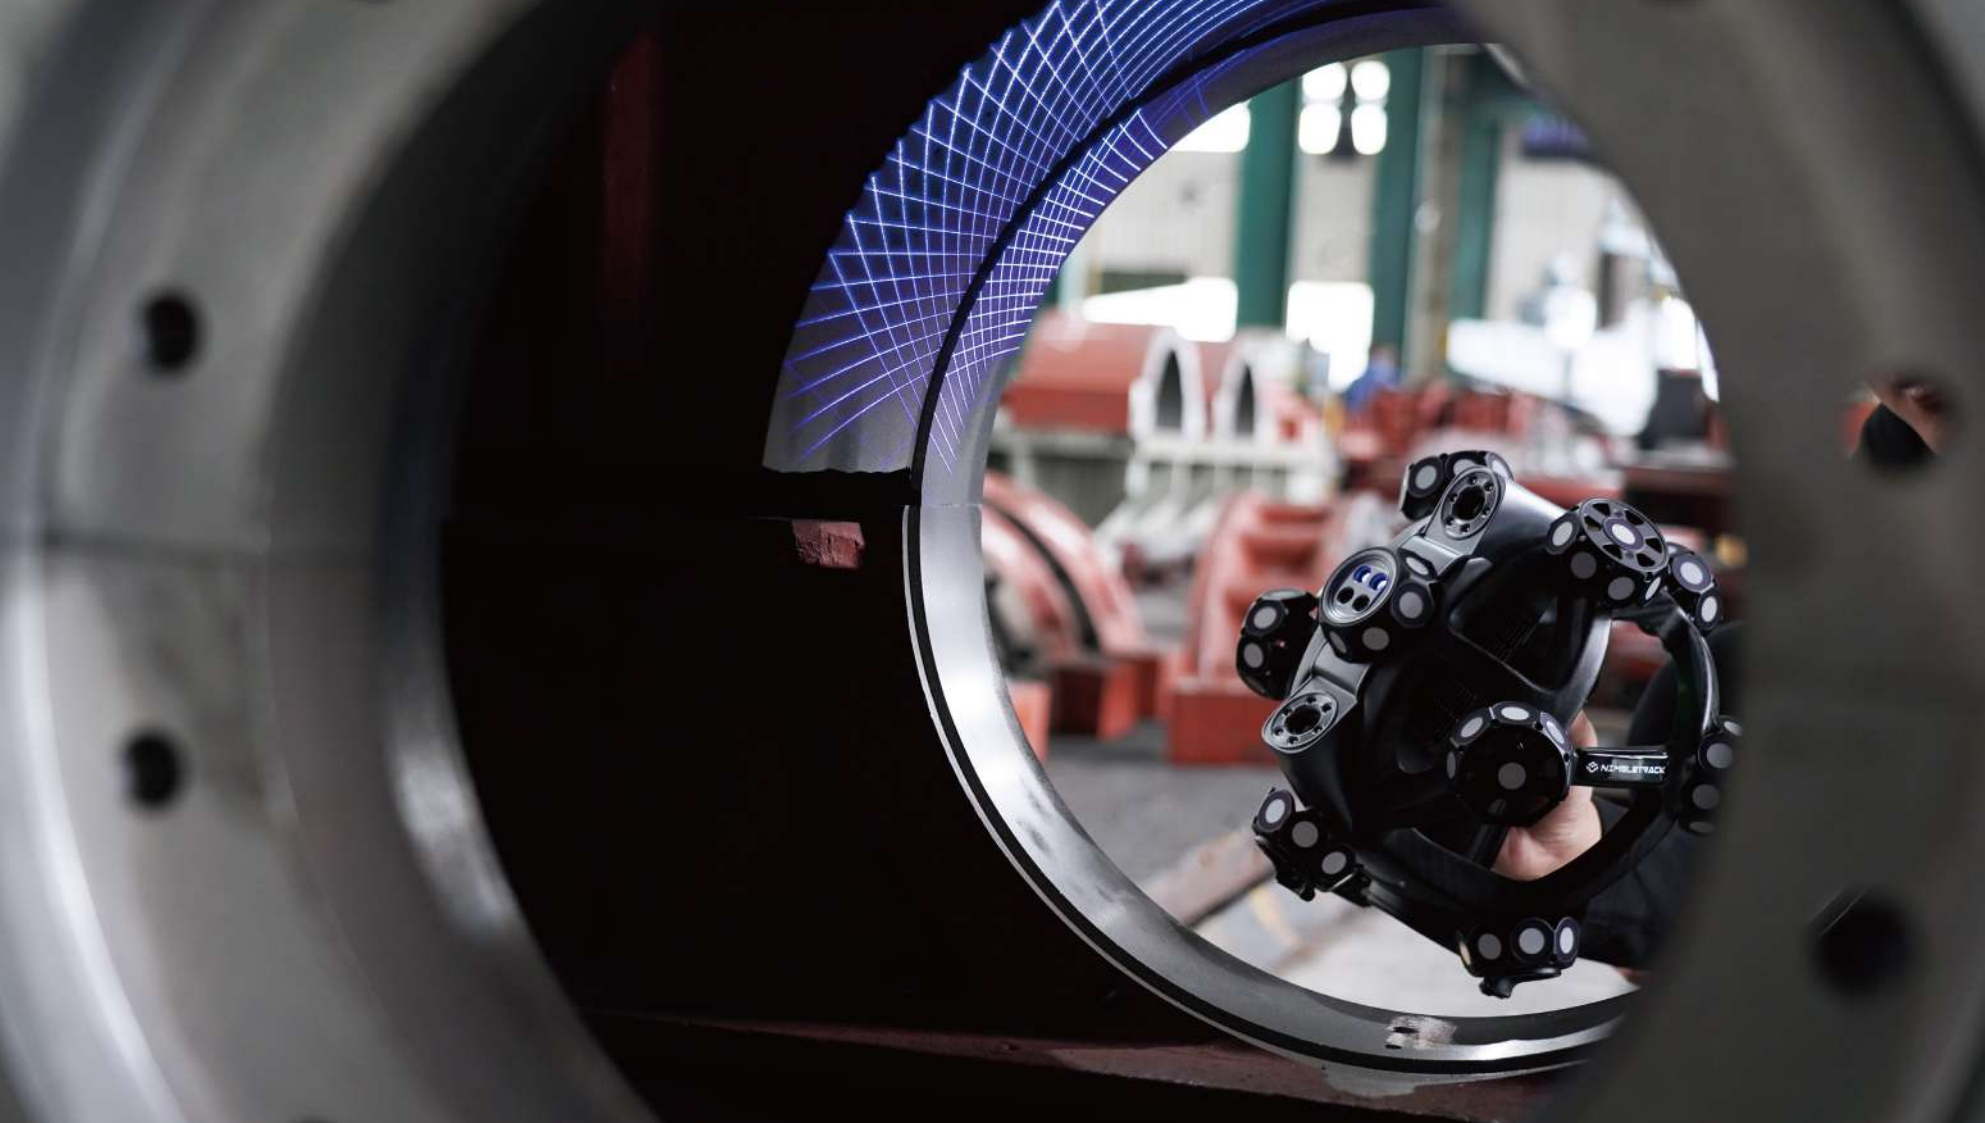


Next Level 3D Scanning

NimbleTrack is smaller, smarter, and mightier, allowing users to explore novel applications for industrial measurements.

When dealing with narrow spaces or hard-to-reach areas, the 3D scanner can be operated wirelessly and independently, allowing for instant scanning and one-handed control. This enables high-precision scanning of up to 0.020 mm at any time and in any location.

When measuring even larger-sized parts, the optical tracker can further enhance precision by using its built-in infrared large-area photogrammetry to reduce accumulated errors accumulated by scan alignment.

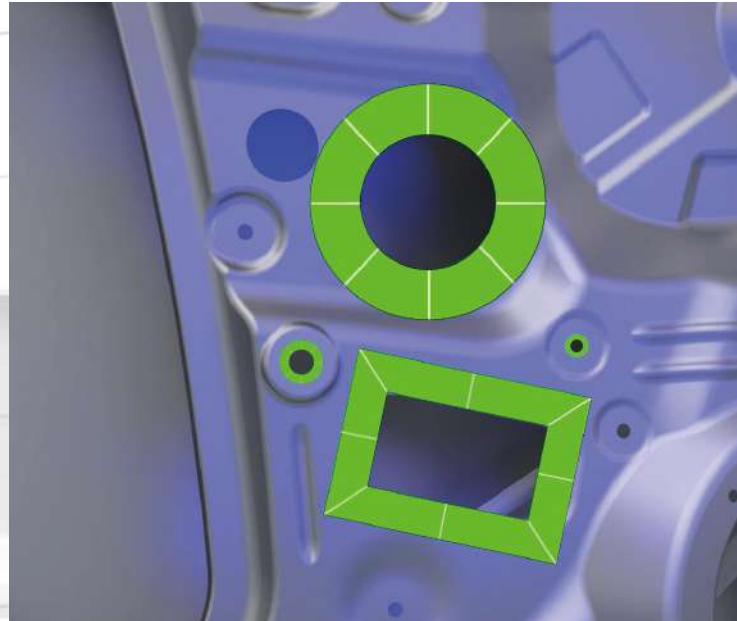


Intelligent Edge Detection

NimbleTrack boasts a stand-out function of precise edge detection, which is enabled by gray-value measurement. Users can inspect closed features such as holes, slots, edges precisely and obtain information such as positions and diameters.

Automated Measurement

Based on the new 3D scanner architecture, we have customized a clamping method for automated measurement, making it more compatible with various types of robots. Its 360-degree evenly distributed target sets allow for all-round and precise tracking, facilitating forming efficient automated batch measurement systems.

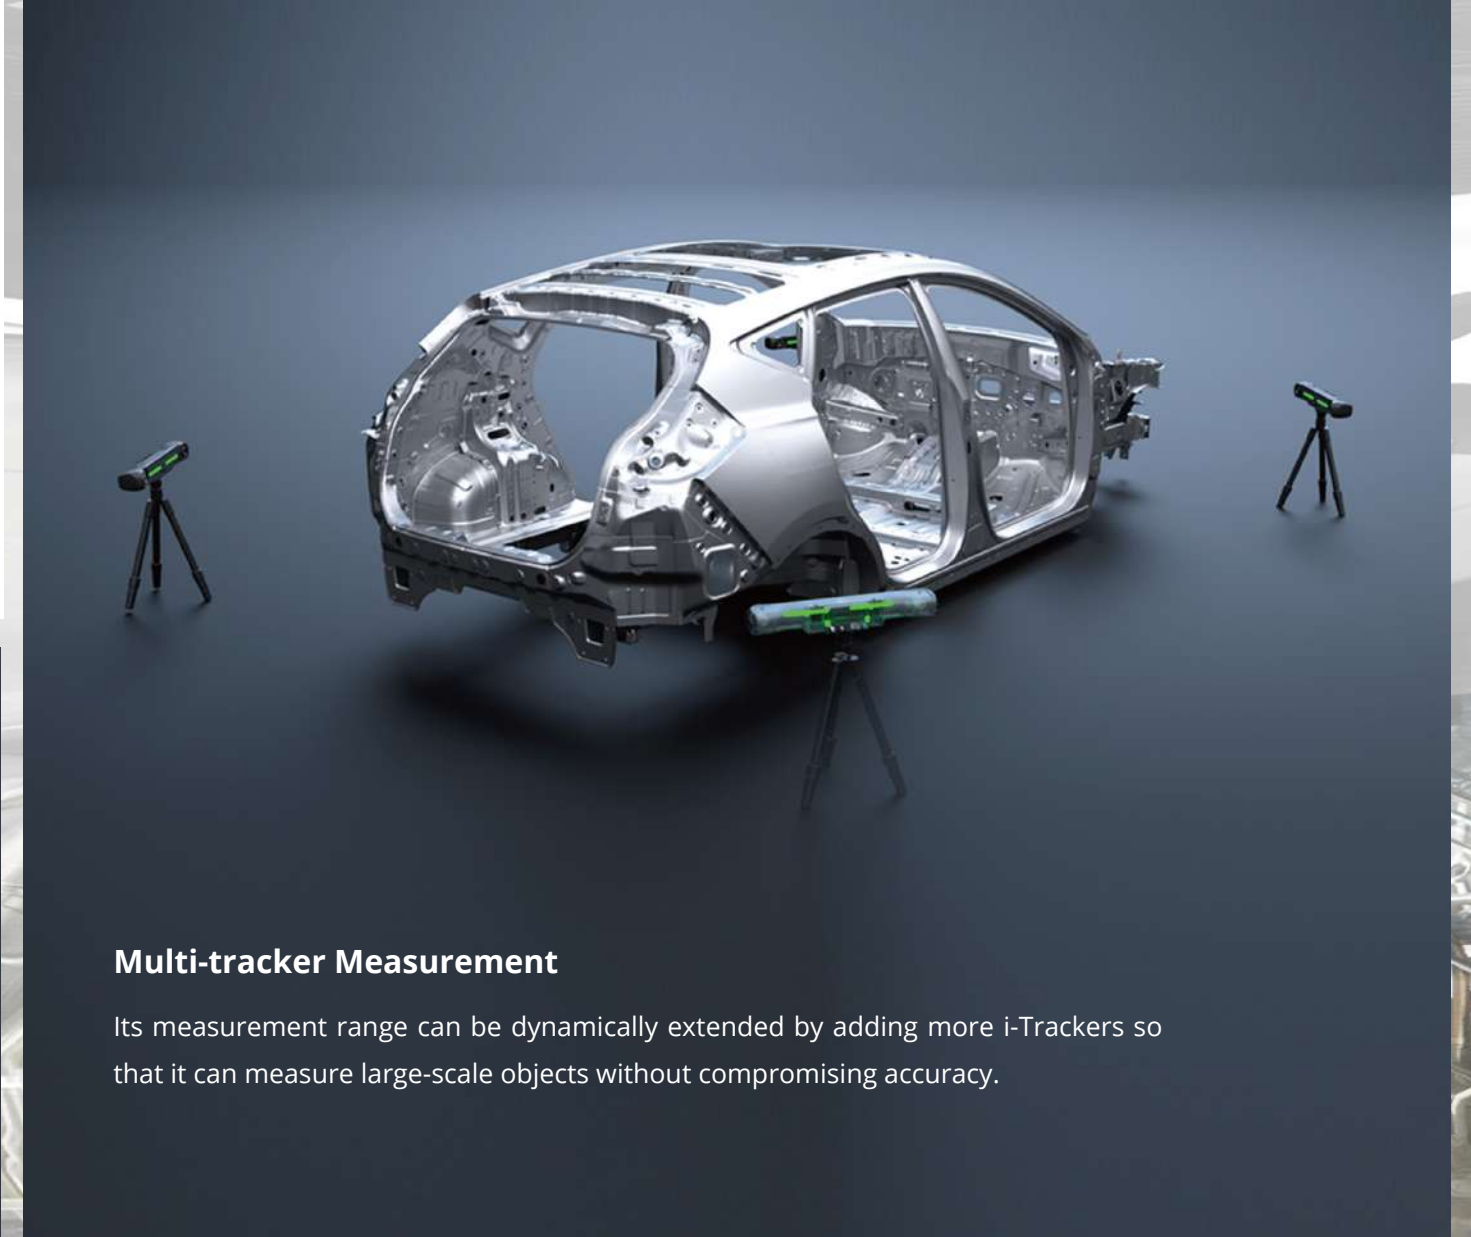

Multi-tracker Measurement

Its measurement range can be dynamically extended by adding more i-Trackers so that it can measure large-scale objects without compromising accuracy.



i-Probe500

It can be paired with a tracking i-Probe to probe inaccessible areas such as reference holes and hidden points. This contact measurement probe can ensure precise results with both wired and wireless options.



Technical Parameter

Type		NimbleTrack-C
Scan mode	Ultra-fast scanning	17 blue laser crosses
	Hyperfine scanning	7 blue parallel laser lines
	Deep hole scanning	1 blue laser line
Accuracy for i-Sanner ⁽¹⁾		Up to 0.020 mm (0.0008 in)
Accuracy for i-Tracker ⁽¹⁾		Up to 0.025 mm (0.0009 in)
Tracking distance per i-Tracker		3200 mm (126.0 in)
Volumetric accuracy ⁽²⁾ (Tracking distance 3.2 m)		0.064 mm (0.0025 in)
Volumetric accuracy (With MSCAN photogrammetry system)		0.044 mm + 0.012 mm/m (0.0017 in + 0.00014 in/ft)
Hole position accuracy		0.050 mm (0.0020 in)
Laser class		Class II (eye-safe)
Resolution up to		0.020 mm (0.0008 in)
Stand-off distance		300 mm (11.8 in)
Depth of field		400 mm (15.7 in)
Scanning area up to		500 mm × 600 mm (19.7 in × 23.6 in)
Scanning frame rate		120 fps
Measurement rate up to		4,900,000 measurements/s
Dimension of i-Scanner		238 mm × 203 mm × 230 mm (9.4 in × 8.0 in × 9.1 in)
Weight of i-Scanner		1.3 kg (Net weight) (2.87 lb), 1.4 kg (Battery abd wireless module included) (3.09 lb)
Dimension of i-Tracker		570 mm × 87 mm × 94 mm (22.4 in x 3.4 in x 3.7 in)
Weight of i-Tracker		2.2 kg (Net weight) (4.85 lb), 2.6 kg (Battery and wireless module included) (5.73 lb)
Size of protection case		1000 mm × 425 mm × 280 mm (39.4 in × 16.7 in × 11.0 in)
Output format		.stl, .obj, .ply, .asc, .igs, .txt, .mk2, .umk and etc.
Operating temperature range		-10°C – 40°C (14 °F - 104°F)
Operating humidity (Non-condensation)		10-90% RH
Wireless operating mode		i-Scanner, i-Tracker, i-Scanner + i-Tracker, i-Tracker + i-Probe, Wireless multi-tracker tacking, Edge Inspection
Wireless standard		802.11a/n/ac
Interface mode		USB 3.0, Network Interface
Patents		CN211121096U,CN210567185U,CN111678459B,CN114001696B,CN114554025B,CN114205483B,CN113514008B,CN114627249B,CN112867136B,CN218103220U,CN218103238U,CN307756797S,CN113340234B,CN112964196B,CN115289974B,CN113188476B,CN218411072U,CN115325959B,CN218584004U,CN115661369B,CN218734448U,CN115493512B,CN110992393B,CN116136396B,CN113432561B,CN219834226U,CN219829788U,CN116244730B,CN116206069B,US10309770B2,US10309770B2,US11060853B2,KR102096806B1,EP3392831B1,US11493326B2,CN109000582B

(1) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, probing error (size) (PS) performance is evaluated.
(2) ISO 17025 accredited: Based on VDI/VDE 2634 Part 3 standard and JJF 1951 specification, sphere spacing error (SD) performance is evaluated.

