

■ F3030TA015C.ALWE000



- Energy savings up to 58% (30W for replacing T8 18W X 4 fixture)
- Uniform light distribution
- Light weight for fast and reliable installation
- Plug-and-play interface for multi sensor or DALI/ZigBee control
- Application
 - Offices, Schools, Healthcare


□ Specification




Type	UGR <19	Beam angle (°)	82
Equivalent to (W)	T8 18W x4	Color temperature (K)	3,000
Wattage (W)	30	Color rendering index (Ra)	83
Lumen output (lm)	3,600	Operating temperature (°C)	-20 ~ +40
Efficacy (lm/W)	120	Average lifetime (hrs)	50,000 (L80B10)
Voltage (V AC)	220 ~ 240	Dimensions (LxWxH, mm)	596 x 596 x 64.1
Frequency (Hz)	50/60	Weight (kg)	2.5
Input current (mA)	Max. 170	IP / IK Level	20 / 02
Power factor	> 0.9	Glow wire test (°C)	850
THD (%)	< 20	Dimmable (Optional)	0-10V (DALI/ZigBee)
Surge Protection (kV)	< 1.0	Certification	CE, ENEC

※ Specifications are subject to change without notice

□ Dimensions

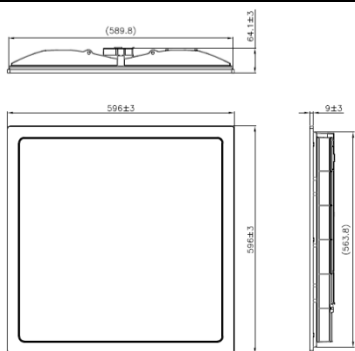

□ Photometric Data

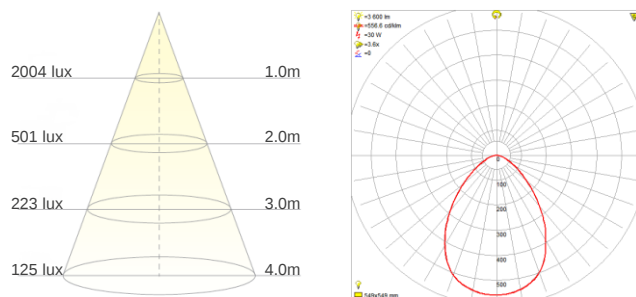

■ F3040TA015C.ALWE000



- Energy savings up to 58% (30W for replacing T8 18W X 4 fixture)
- Uniform light distribution
- Light weight for fast and reliable installation
- Plug-and-play interface for multi sensor or DALI/ZigBee control
- Application
 - Offices, Schools, Healthcare


□ Specification



Type	UGR <19	Beam angle (°)	82
Equivalent to (W)	T8 18W x4	Color temperature (K)	4,000
Wattage (W)	30	Color rendering index (Ra)	83
Lumen output (lm)	3,600	Operating temperature (°C)	-20 ~ +40
Efficacy (lm/W)	120	Average lifetime (hrs)	50,000 (L80B10)
Voltage (V AC)	220 ~ 240	Dimensions (LxWxH, mm)	596 x 596 x 64.1
Frequency (Hz)	50/60	Weight (kg)	2.5
Input current (mA)	Max. 170	IP / IK Level	20 / 02
Power factor	> 0.9	Glow wire test (°C)	850
THD (%)	< 20	Dimmable (Optional)	0-10V (DALI/ZigBee)
Surge Protection (kV)	< 1.0	Certification	CE, ENEC

※ Specifications are subject to change without notice

□ Dimensions

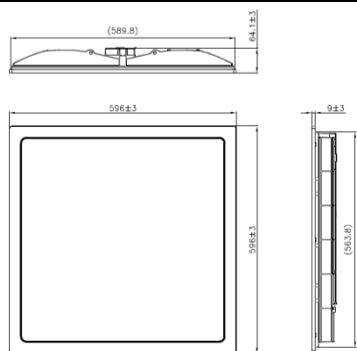

□ Photometric Data

