

■ H1457P901SA.ALWE000



- Energy savings up to 44% (140W for replacing MH250W)
- Suitable for installation in harsh environment (IP65/IK08/-30~+50°C)
- Light weight for easier handling & installation
- Further energy savings by motion sensor & wireless control options
- Application
 - Factories, Gymnasiums, Warehouses


□ Specification



Type	Highbay	Beam angle (°)	90
Equivalent to (W)	MH 250W	Color temperature (K)	5,700
Wattage (W)	140	Color rendering index (Ra)	83
Lumen output (lm)	15,600	Operating temperature (°C)	-30 ~ +50
Efficacy (lm/W)	111	Average lifetime (hrs)	50,000 (L80B10)
Voltage (V AC)	200 ~ 240	Dimensions (DxWxH, mm)	Ø460 x 472 x 158
Frequency (Hz)	50/60	Weight (kg)	3.7
Input current (A)	Max. 1.37	IP / IK Level	65 / 08
Power factor	> 0.9	Surge Protection (kV)	< 3.0
THD (%)	< 20	Glow wire test (°C)	850
Inrush current (A)	Max. 62 (I peak max)	Dimmable (Optional)	0-10V (DALI/ZigBee)
T_50% I peak (µsec)	7.2	Certification	CE, ENEC

※ Specifications are subject to change without notice

□ Dimensions

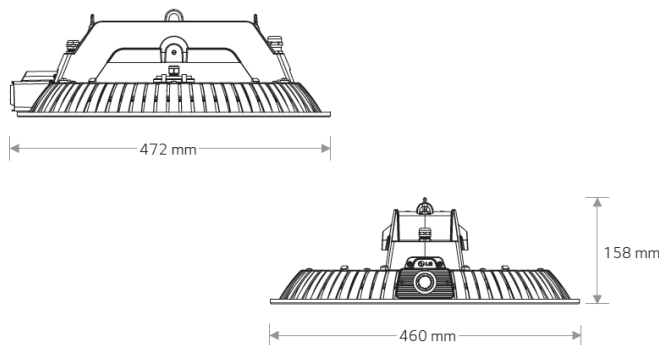

□ Photometric Data

