


VT 20K | VT 20 Formwork Girders

The cost-effective solid web girder

Product Brochure

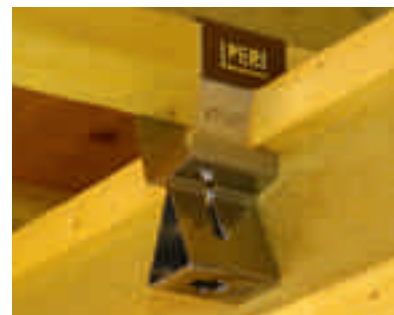

VT 20K Formwork Girder

The cost-effective solid web girder

The cost-effective PERI VT 20K solid web girder can be used universally. The wooden formwork girder with a 20 cm overall height is optimized for use in slab formwork operations. Especially for thin slabs with short spans, the solid web girder provides the most appropriate solution. The VT 20K is extremely economical to use also for special solutions – ranging from simple beams through to bridge or tunnel formwork projects.

The girder is available in 11 lengths from 1.45 m to 5.90 m and, as a rule, has robust steel caps fitted at the end of the chords. These steel caps along with the concave web end provide the girder with reliable protection against damage. Alternatively, the girder can also be supplied without caps.

Robust


with steel caps on the chord ends and concave web ends

Site-compliant quality

with chords made of high-quality softwood and a highly compressed web board with a high proportion of synthetic resin

Universal

Used cost-effectively for many applications

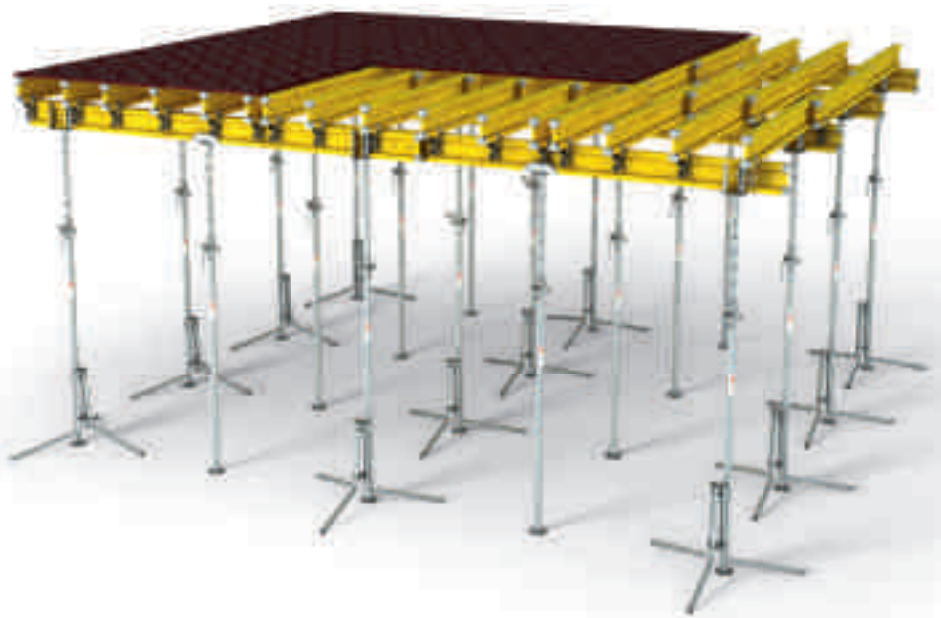

Technical data

Weight: 5.90 kg/m

Permissible shear force: 11.00 kN

Permissible bending moment: 5.0 kNm

Flexural strength: $EI_v = 460 \text{ kNm}^2$


$I_v = 4.181 \text{ cm}^4$



Steel caps on the ends of the chords provide reliable protection against damage. Securing of the steel cap has been intentionally done in the unstressed area of the web.



The girder with a 20 cm overall height was developed especially for slab formwork operations. It can be used as a secondary and main beam.

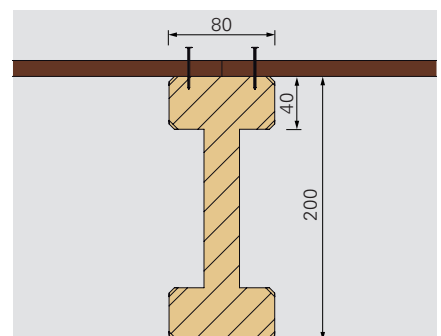

The 4 x 8 cm thick chords provide sufficient width for nailing plywood joints.

Item no.	Weight kg
074990	8.560
074905	12.700
074910	14.460
074890	15.640
074920	17.110
074930	19.470
074940	21.240
074950	23.010
074960	26.550
074970	28.910
074980	34.810

VT 20K Girders with Steel Caps



VT 20K Girder, L = 1.45 m
VT 20K Girder, L = 2.15 m
VT 20K Girder, L = 2.45 m
VT 20K Girder, L = 2.65 m
VT 20K Girder, L = 2.90 m
VT 20K Girder, L = 3.30 m
VT 20K Girder, L = 3.60 m
VT 20K Girder, L = 3.90 m
VT 20K Girder, L = 4.50 m
VT 20K Girder, L = 4.90 m
VT 20K Girder, L = 5.90 m

Versatile formwork girder made of wood.

L
1447
2152
2452
2652
2902
3292
3592
3892
4492
4902
5902

Note

The girder fulfils all requirements of DIN EN 13377 Class P20 (Declaration of Conformity).

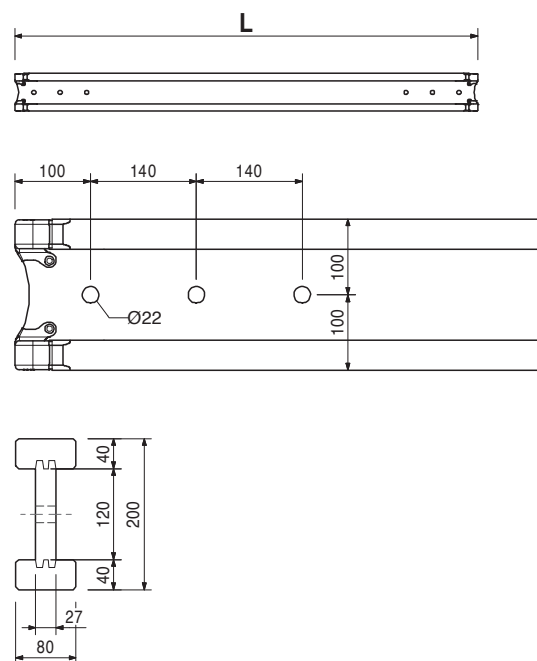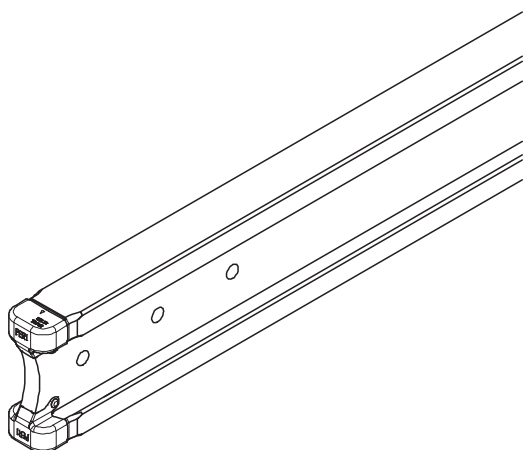

		VT 20 Girders without Steel Caps	L
073710	8.560	VT 20 Girder, L = 1.45 m	1445
073720	12.700	VT 20 Girder, L = 2.15 m	2150
073730	14.460	VT 20 Girder, L = 2.45 m	2450
073740	15.640	VT 20 Girder, L = 2.65 m	2650
073750	17.110	VT 20 Girder, L = 2.90 m	2900
073760	19.470	VT 20 Girder, L = 3.30 m	3290
073770	21.240	VT 20 Girder, L = 3.60 m	3590
073780	23.010	VT 20 Girder, L = 3.90 m	3890
073790	26.550	VT 20 Girder, L = 4.50 m	4490
073800	28.910	VT 20 Girder, L = 4.90 m	4900
073810	34.810	VT 20 Girder, L = 5.90 m	5900

**The optimal System
for every Project and
every Requirement**



Wall Formwork



Column Formwork



Slab Formwork



Climbing Systems




Bridge Formwork



Tunnel Formwork



Shoring Systems



Construction Scaffold



Facade Scaffold



Industrial Scaffold



Access



Protection Scaffold



Safety Systems



System-Independent Accessories



Services



PERI GmbH
Formwork Scaffolding Engineering
 Rudolf-Diesel-Strasse 19
 89264 Weissenhorn
 Germany
 Tel. +49 (0) 7309.950-0
 Fax +49 (0) 7309.951-0
 info@peri.com
 www.peri.com